



SSD1303

Advance Information

**132 x 64 Dot Matrix
OLED/PLED Segment/Common Driver with Controller**

This document contains information on a new product. Specifications and information herein are subject to change without notice.

<http://www.solomon-systech.com>

SSD1303 | Rev 1.7 | P 1/56 | May 2005 | Copyright © 2005 **Solomon Systech Limited**



TABLE OF CONTENTS

| | | |
|-----------|---|-----------|
| 1 | GENERAL INFORMATION | 5 |
| 2 | FEATURES | 5 |
| 3 | ORDERING INFORMATION | 6 |
| 4 | BLOCK DIAGRAM | 7 |
| 5 | DIE PAD FLOOR PLAN..... | 8 |
| 6 | PIN DESCRIPTION | 12 |
| 7 | FUNCTIONAL BLOCK DESCRIPTIONS..... | 15 |
| 7.1 | OSCILLATOR CIRCUIT AND DISPLAY TIME GENERATOR | 15 |
| 7.2 | RESET CIRCUIT | 15 |
| 7.3 | COMMAND DECODER AND COMMAND INTERFACE | 15 |
| 7.4 | MPU PARALLEL 6800-SERIES INTERFACE | 16 |
| 7.5 | MPU PARALLEL 8080-SERIES INTERFACE | 16 |
| 7.6 | MPU SERIAL INTERFACE..... | 17 |
| 7.7 | GRAPHIC DISPLAY DATA RAM (GDDRAM) | 17 |
| 7.8 | CURRENT CONTROL AND VOLTAGE CONTROL..... | 17 |
| 7.9 | SEGMENT DRIVERS / COMMON DRIVERS | 18 |
| 7.10 | AREA COLOUR DECODER..... | 18 |
| 7.11 | DC-DC VOLTAGE CONVERTER | 19 |
| 8 | COMMAND TABLE | 21 |
| 8.1 | DATA READ / WRITE..... | 24 |
| 9 | COMMAND DESCRIPTIONS..... | 25 |
| 10 | MAXIMUM RATINGS | 32 |
| 11 | DC CHARACTERISTICS | 33 |
| 12 | AC CHARACTERISTICS | 34 |
| 13 | APPLICATION EXAMPLE | 38 |
| 14 | SSD1303T3R1 PACKAGE DETAILS..... | 39 |
| | SSD1303T3R1 PIN ASSIGNMENT | 39 |
| 15 | SSD1303T6R1 PACKAGE DETAILS..... | 43 |
| | SSD1303T6R1 PIN ASSIGNMENT | 43 |
| | SSD1303T6R1 TAB PACKAGE DIMENSIONS | 45 |
| 16 | SSD1303T8R1 PACKAGE DETAILS..... | 47 |
| | SSD1303T8R1 PIN ASSIGNMENT | 47 |
| | SSD1303T8R1 TAB PACKAGE DIMENSIONS | 49 |
| 17 | SSD1303T9R1 PACKAGE DETAILS..... | 51 |
| | SSD1303T9R1 PIN ASSIGNMENT | 51 |
| | SSD1303T9R1 TAB PACKAGE DIMENSIONS | 53 |

18 SSD1303Z PACKAGE DETAILS55

TABLE OF FIGURES

| | |
|---|----|
| Figure 1 - Block Diagram..... | 7 |
| Figure 2 - SSD1303Z Pin Assignment | 8 |
| Figure 3 - SSD1303Z Alignment mark dimensions | 11 |
| Figure 4 - Oscillator Circuit..... | 15 |
| Figure 5 - Display data read back procedure - insertion of dummy read..... | 16 |
| Figure 6 – Display data write procedure in SPI mode..... | 17 |
| Figure 7 - DC-DC voltage converter circuit | 19 |
| Figure 8 - Horizontal scroll direction..... | 25 |
| Figure 9 - Segment current vs Contrast setting | 26 |
| Figure 10 - 6800-series MPU parallel interface characteristics | 35 |
| Figure 11 - 8080-series MPU parallel interface characteristics | 36 |
| Figure 12 - Serial interface characteristics..... | 37 |
| Figure 13 - Application Example (Block Diagram of SSD1303T3)..... | 38 |
| Figure 14 - SSD1303T3R1 pin assignment (Copper view, Normal TAB design) | 39 |
| Figure 15 - SSD1303T6R1 pin assignment (Copper view)..... | 43 |
| Figure 16 - SSD1303T9R1 pin assignment (Copper view)..... | 51 |

LIST OF TABLES

| | |
|---|----|
| Table 1 - Ordering Information | 6 |
| Table 2 - SSD1303Z Die Pad Coordinates | 9 |
| Table 3 - Passive component selection: | 20 |
| Table 4 - Command table..... | 21 |
| Table 5 - Read command table..... | 23 |
| Table 6 - Address increment table (Automatic)..... | 24 |
| Table 7 - Maximum Ratings | 32 |
| Table 8 - DC Characteristics | 33 |
| Table 9 - AC Characteristics | 34 |
| Table 10 - 6800-Series MPU Parallel Interface Timing Characteristics..... | 35 |
| Table 11 - 8080-Series MPU Parallel Interface Timing Characteristics..... | 36 |
| Table 12 - Serial Interface Timing Characteristics | 37 |
| Table 13 - SSD1303T3R1 pin assignment..... | 40 |
| Table 14 - SSD1303T6R1 pin assignment..... | 44 |
| Table 15 - SSD1303T8R1 pin assignment..... | 48 |
| Table 16 - SSD1303T9R1 pin assignment..... | 52 |

1 GENERAL INFORMATION

The SSD1303 is a single-chip CMOS OLED/PLED driver with controller for organic/polymer light emitting diode dot-matrix graphic display system. It consists of 132 segments, 64 commons that can support a maximum display resolution of 132x64. Besides, there are 4-colour selections to support monochrome or area colour OLED/PLED. This IC is designed for Common Cathode type OLED panel.

The SSD1303 embeds with contrast control, display RAM and oscillator, which reduces the number of external components and power consumption. It is suitable for many compact portable applications, such as mobile phone sub-display, calculator and MP3 player, etc.

2 FEATURES

- Support maximum 132 x 64 dot matrix panel
- Area colour support with 4 Colour Selection and 64 steps per colour
- Logic voltage supply: $V_{DD} = 2.4V - 3.5V$
- High voltage supply: $V_{CC} = 7.0V - 16.0V$
- Maximum segment output current: 320uA
- Maximum common sink current: 45mA
- Embedded 132 x 64 bit SRAM display buffer
- 256-step Contrast Control on monochrome passive OLED panel
- On-Chip Oscillator
- Programmable Frame Frequency and Multiplexing Ratio
- 8-bit 6800-series Parallel Interface, 8-bit 8080-series Parallel Interface, Serial Peripheral Interface
- Row Re-mapping and Column Re-mapping
- Vertical Scrolling
- Automatic horizontal scrolling function
- Low power consumption
- Wide range of operating temperatures: -40 to 90 °C

3 ORDERING INFORMATION

Table 1 - Ordering Information

| Ordering Part Number | SEG | COM | Package Form | Reference | Remark |
|----------------------|-----|-----|---------------|-----------|---|
| SSD1303Z | 132 | 64 | Gold Bump Die | Page 8 | Die size: 9.22mm x 1.55mm Pad pitch: COM 51.8µm SEG 52.2µm |
| SSD1303T3R1 | 96 | 64 | TAB | Page 39 | <ul style="list-style-type: none"> • 35mm film • 4 sprocket hole • Folding TAB • 80 / 68 / SPI interface • Output lead pitch 0.12974mm |
| SSD1303T6R1 | 132 | 64 | TAB | Page 43 | <ul style="list-style-type: none"> • 35mm film • 4 sprocket hole • Folding TAB • 80 / 68 / SPI interface • Output lead pitch 0.11976 |
| SSD1303T8R1 | 96 | 64 | TAB | Page 47 | <ul style="list-style-type: none"> • 35mm film • 4 sprocket hole • Folding TAB • 80 / 68 / SPI interface • Output lead pitch 0.12974mm |
| SSD1303T9R1 | 96 | 64 | TAB | Page 51 | <ul style="list-style-type: none"> • 35mm film • 4 sprocket hole • Folding TAB • 80 / 68 / SPI interface • Output lead pitch 0.12974mm |

4 BLOCK DIAGRAM



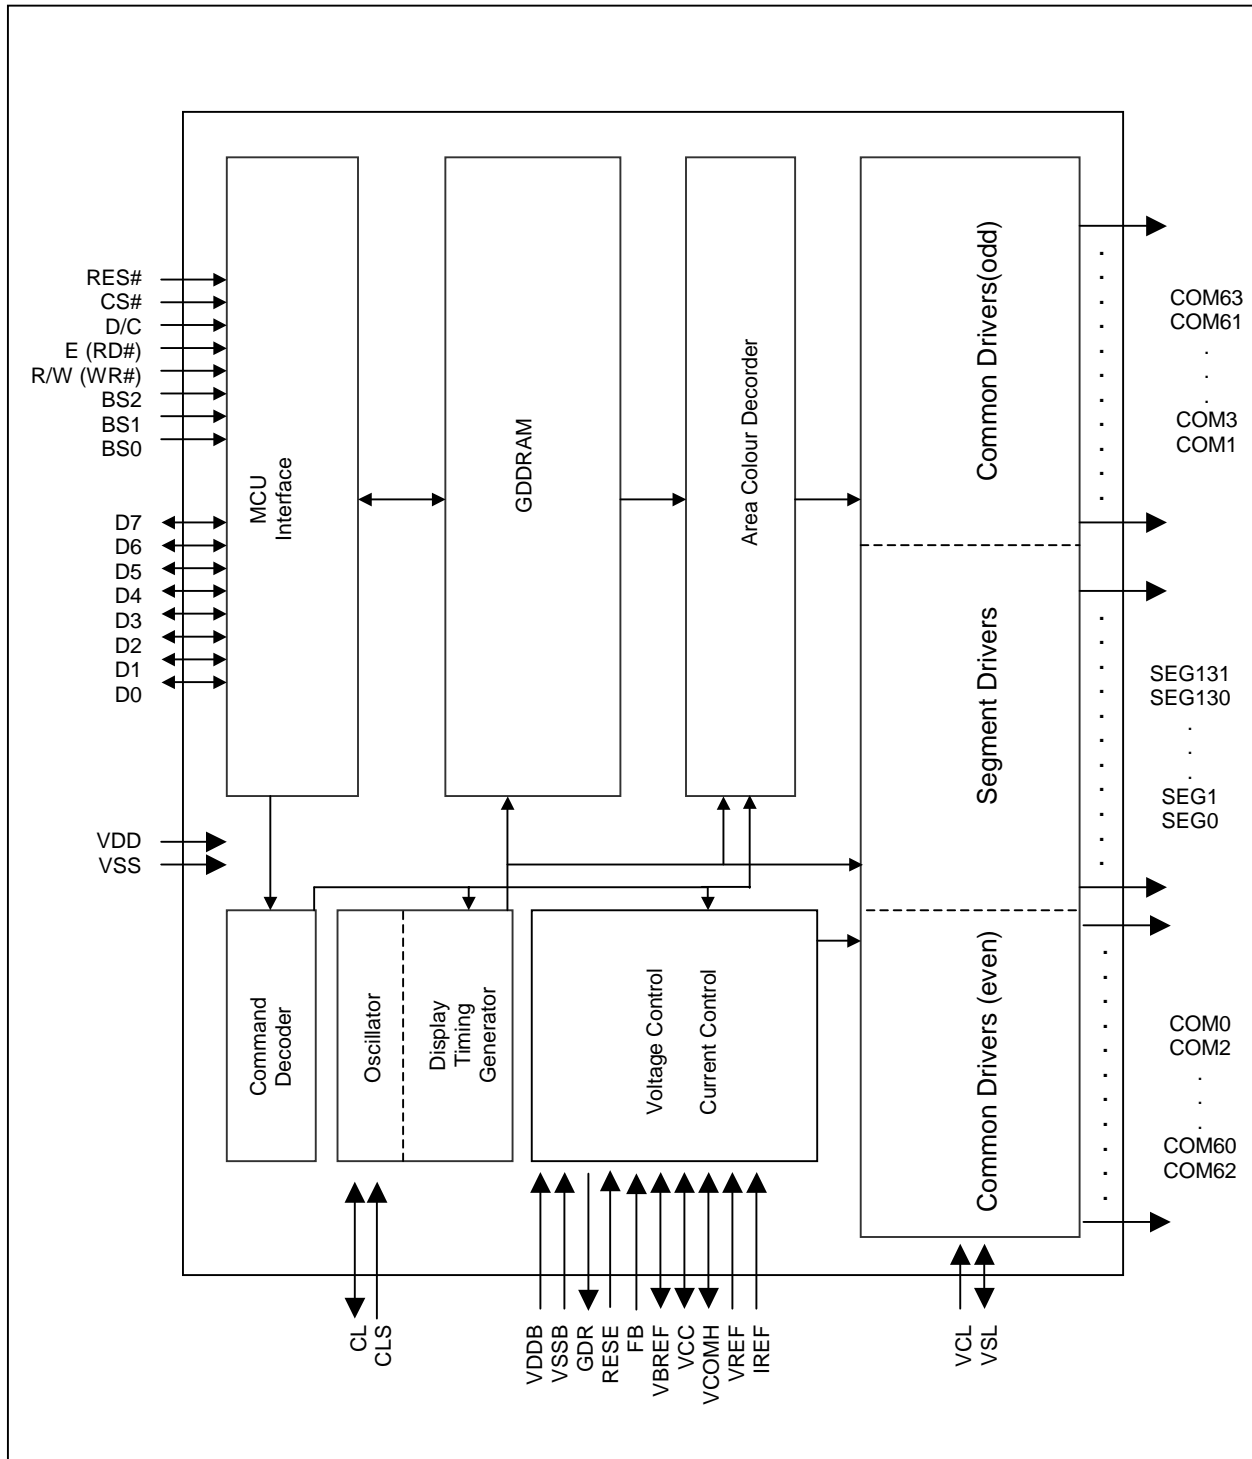


Figure 1 - Block Diagram

5 DIE PAD FLOOR PLAN

Figure 2 - SSD1303Z Pin Assignment

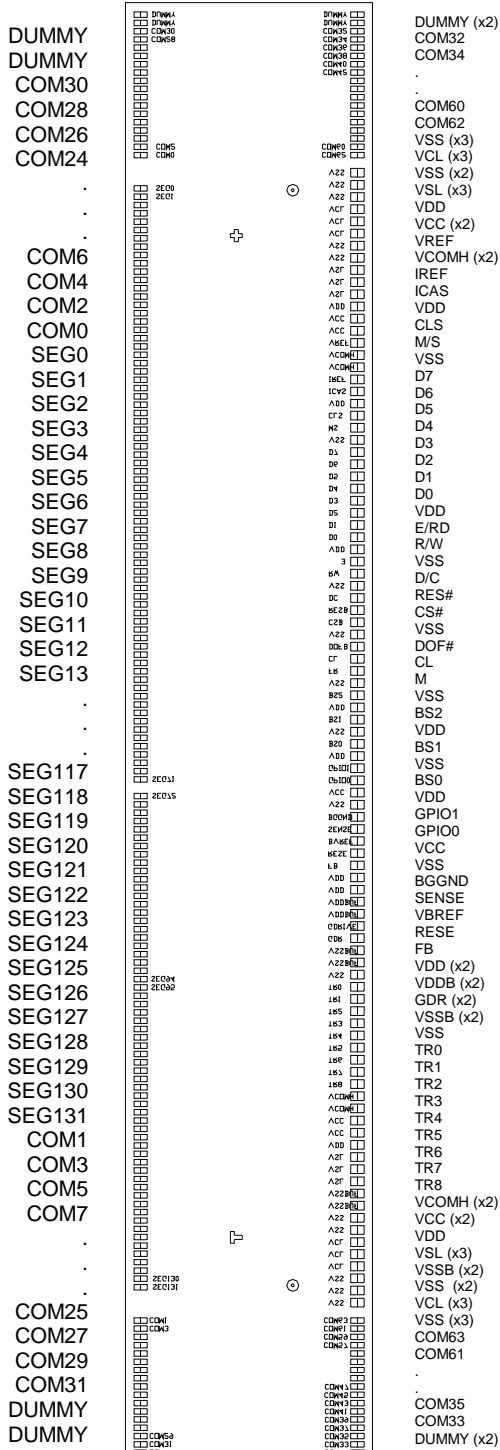

| | |
|------------|-----------------|
| Die size | 9.22mm x 1.55mm |
| Die height | 475 +/- 25um |

| | |
|-------------------|--------------|
| Bump height | Nominal 18um |
| Bump size | |
| Pad 1-18, 113-298 | 34um x 84um |
| Pad 19-112 | 54um x 84um |

| Alignment mark | | |
|----------------|-------------------|--------------------|
| T shape | (-3132.9, 79.5) | 75um x 75um |
| + shape | (3148.9, 79.5) | 75um x 75um |
| Circle | (3433.9, -274.6) | R37.5um inner 18um |
| Circle | (-3433.9, -274.6) | R37.5um inner 18um |


PAD 1

Table 2 - SSD1303Z Die Pad Coordinates


| Pad no. | Pad Name | X-pos | Y-pos | Pad no. | Pad Name | X-pos | Y-pos | Pad no. | Pad Name | X-pos | Y-pos |
|---------|----------|---------|--------|---------|----------|--------|--------|---------|----------|--------|--------|
| 1 | NC | -4535.4 | -679.6 | 61 | VCC | -342.9 | -679.6 | 121 | COM46 | 4068.4 | -679.6 |
| 2 | NC | -4483.2 | -679.6 | 62 | GPIO0 | -267.2 | -679.6 | 122 | COM44 | 4120.2 | -679.6 |
| 3 | COM33 | -4431.0 | -679.6 | 63 | GPIO1 | -190.5 | -679.6 | 123 | COM42 | 4172.0 | -679.6 |
| 4 | COM35 | -4379.2 | -679.6 | 64 | VDD | -114.3 | -679.6 | 124 | COM40 | 4223.8 | -679.6 |
| 5 | COM37 | -4327.4 | -679.6 | 65 | BS0 | -38.1 | -679.6 | 125 | COM38 | 4275.6 | -679.6 |
| 6 | COM39 | -4275.6 | -679.6 | 66 | VSS | 38.1 | -679.6 | 126 | COM36 | 4327.4 | -679.6 |
| 7 | COM41 | -4223.8 | -679.6 | 67 | BS1 | 114.3 | -679.6 | 127 | COM34 | 4379.2 | -679.6 |
| 8 | COM43 | -4172.0 | -679.6 | 68 | VDD | 190.5 | -679.6 | 128 | COM32 | 4431.0 | -679.6 |
| 9 | COM45 | -4120.2 | -679.6 | 69 | BS2 | 266.7 | -679.6 | 129 | NC | 4483.2 | -679.6 |
| 10 | COM47 | -4068.4 | -679.6 | 70 | VSS | 342.9 | -679.6 | 130 | NC | 4535.4 | -679.6 |
| 11 | COM49 | -4016.6 | -679.6 | 71 | M | 419.1 | -679.6 | 131 | NC | 4535.4 | 679.6 |
| 12 | COM51 | -3964.8 | -679.6 | 72 | CL | 495.3 | -679.6 | 132 | NC | 4483.2 | 679.6 |
| 13 | COM53 | -3913.0 | -679.6 | 73 | DOF# | 571.5 | -679.6 | 133 | COM30 | 4431.0 | 679.6 |
| 14 | COM55 | -3861.2 | -679.6 | 74 | VSS | 647.7 | -679.6 | 134 | COM28 | 4379.2 | 679.6 |
| 15 | COM57 | -3809.4 | -679.6 | 75 | CS# | 723.9 | -679.6 | 135 | COM26 | 4327.4 | 679.6 |
| 16 | COM59 | -3757.6 | -679.6 | 76 | RES# | 800.1 | -679.6 | 136 | COM24 | 4275.6 | 679.6 |
| 17 | COM61 | -3705.8 | -679.6 | 77 | D/C | 876.3 | -679.6 | 137 | COM22 | 4223.8 | 679.6 |
| 18 | COM63 | -3654.0 | -679.6 | 78 | VSS | 952.5 | -679.6 | 138 | COM20 | 4172.0 | 679.6 |
| 19 | VSS | -3543.3 | -679.6 | 79 | R/W | 1028.7 | -679.6 | 139 | COM18 | 4120.2 | 679.6 |
| 20 | VSS | -3467.1 | -679.6 | 80 | E/RD | 1104.9 | -679.6 | 140 | COM16 | 4068.4 | 679.6 |
| 21 | VSS | -3390.9 | -679.6 | 81 | VDD | 1181.1 | -679.6 | 141 | COM14 | 4016.6 | 679.6 |
| 22 | VCL | -3314.7 | -679.6 | 82 | D0 | 1257.3 | -679.6 | 142 | COM12 | 3964.8 | 679.6 |
| 23 | VCL | -3238.5 | -679.6 | 83 | D1 | 1333.5 | -679.6 | 143 | COM10 | 3913.0 | 679.6 |
| 24 | VCL | -3162.3 | -679.6 | 84 | D2 | 1409.7 | -679.6 | 144 | COM8 | 3861.2 | 679.6 |
| 25 | VSS | -3086.1 | -679.6 | 85 | D3 | 1485.9 | -679.6 | 145 | COM6 | 3809.4 | 679.6 |
| 26 | VSS | -3009.9 | -679.6 | 86 | D4 | 1562.1 | -679.6 | 146 | COM4 | 3757.6 | 679.6 |
| 27 | VSSB | -2933.7 | -679.6 | 87 | D5 | 1638.3 | -679.6 | 147 | COM2 | 3705.8 | 679.6 |
| 28 | VSSB | -2857.5 | -679.6 | 88 | D6 | 1714.5 | -679.6 | 148 | COM0 | 3654.0 | 679.6 |
| 29 | VSL | -2781.3 | -679.6 | 89 | D7 | 1790.7 | -679.6 | 149 | SEG0 | 3445.2 | 679.6 |
| 30 | VSL | -2705.1 | -679.6 | 90 | VSS | 1866.9 | -679.6 | 150 | SEG1 | 3393.0 | 679.6 |
| 31 | VSL | -2628.9 | -679.6 | 91 | M/S | 1943.1 | -679.6 | 151 | SEG2 | 3340.8 | 679.6 |
| 32 | VDD | -2552.7 | -679.6 | 92 | CLS | 2019.3 | -679.6 | 152 | SEG3 | 3288.6 | 679.6 |
| 33 | VCC | -2476.5 | -679.6 | 93 | VDD | 2095.5 | -679.6 | 153 | SEG4 | 3236.4 | 679.6 |
| 34 | VCC | -2400.3 | -679.6 | 94 | ICAS | 2171.7 | -679.6 | 154 | SEG5 | 3184.2 | 679.6 |
| 35 | VCOMH | -2324.1 | -679.6 | 95 | IREF | 2247.9 | -679.6 | 155 | SEG6 | 3132.0 | 679.6 |
| 36 | VCOMH | -2247.9 | -679.6 | 96 | VCOMH | 2324.1 | -679.6 | 156 | SEG7 | 3079.8 | 679.6 |
| 37 | TR8 | -2171.7 | -679.6 | 97 | VCOMH | 2400.3 | -679.6 | 157 | SEG8 | 3027.6 | 679.6 |
| 38 | TR7 | -2095.5 | -679.6 | 98 | VREF | 2476.5 | -679.6 | 158 | SEG9 | 2975.4 | 679.6 |
| 39 | TR6 | -2019.3 | -679.6 | 99 | VCC | 2552.7 | -679.6 | 159 | SEG10 | 2923.2 | 679.6 |
| 40 | TR5 | -1943.1 | -679.6 | 100 | VCC | 2628.9 | -679.6 | 160 | SEG11 | 2871.0 | 679.6 |
| 41 | TR4 | -1866.9 | -679.6 | 101 | VDD | 2705.1 | -679.6 | 161 | SEG12 | 2818.8 | 679.6 |
| 42 | TR3 | -1790.7 | -679.6 | 102 | VSL | 2781.3 | -679.6 | 162 | SEG13 | 2766.6 | 679.6 |
| 43 | TR2 | -1714.5 | -679.6 | 103 | VSL | 2857.5 | -679.6 | 163 | SEG14 | 2714.4 | 679.6 |
| 44 | TR1 | -1638.3 | -679.6 | 104 | VSL | 2933.7 | -679.6 | 164 | SEG15 | 2662.2 | 679.6 |
| 45 | TR0 | -1562.1 | -679.6 | 105 | VSS | 3009.9 | -679.6 | 165 | SEG16 | 2610.0 | 679.6 |
| 46 | VSS | -1485.9 | -679.6 | 106 | VSS | 3086.1 | -679.6 | 166 | SEG17 | 2557.8 | 679.6 |
| 47 | VSSB | -1409.7 | -679.6 | 107 | VCL | 3162.3 | -679.6 | 167 | SEG18 | 2505.6 | 679.6 |
| 48 | VSSB | -1333.5 | -679.6 | 108 | VCL | 3238.5 | -679.6 | 168 | SEG19 | 2453.4 | 679.6 |
| 49 | GDR | -1257.3 | -679.6 | 109 | VCL | 3314.7 | -679.6 | 169 | SEG20 | 2401.2 | 679.6 |
| 50 | GDR | -1181.1 | -679.6 | 110 | VSS | 3390.9 | -679.6 | 170 | SEG21 | 2349.0 | 679.6 |
| 51 | VDDB | -1104.9 | -679.6 | 111 | VSS | 3467.1 | -679.6 | 171 | SEG22 | 2296.8 | 679.6 |
| 52 | VDDB | -1028.7 | -679.6 | 112 | VSS | 3543.3 | -679.6 | 172 | SEG23 | 2244.6 | 679.6 |
| 53 | VDD | -952.5 | -679.6 | 113 | COM62 | 3654.0 | -679.6 | 173 | SEG24 | 2192.4 | 679.6 |
| 54 | VDD | -876.3 | -679.6 | 114 | COM60 | 3705.8 | -679.6 | 174 | SEG25 | 2140.2 | 679.6 |
| 55 | FB | -800.1 | -679.6 | 115 | COM58 | 3757.6 | -679.6 | 175 | SEG26 | 2088.0 | 679.6 |
| 56 | RESE | -723.9 | -679.6 | 116 | COM56 | 3809.4 | -679.6 | 176 | SEG27 | 2035.8 | 679.6 |
| 57 | VBREF | -647.7 | -679.6 | 117 | COM54 | 3861.2 | -679.6 | 177 | SEG28 | 1983.6 | 679.6 |
| 58 | SENSE | -571.5 | -679.6 | 118 | COM52 | 3913.0 | -679.6 | 178 | SEG29 | 1931.4 | 679.6 |
| 59 | BGGND | -495.3 | -679.6 | 119 | COM50 | 3964.8 | -679.6 | 179 | SEG30 | 1879.2 | 679.6 |
| 60 | VSS | -419.1 | -679.6 | 120 | COM48 | 4016.6 | -679.6 | 180 | SEG31 | 1827.0 | 679.6 |

| Pad no. | Pad Name | X-pos | Y-pos | Pad no. | Pad Name | X-pos | Y-pos |
|---------|----------|---------|-------|---------|----------|---------|-------|
| 181 | SEG32 | 1774.8 | 679.6 | 241 | SEG92 | -1409.4 | 679.6 |
| 182 | SEG33 | 1722.6 | 679.6 | 242 | SEG93 | -1461.6 | 679.6 |
| 183 | SEG34 | 1670.4 | 679.6 | 243 | SEG94 | -1513.8 | 679.6 |
| 184 | SEG35 | 1618.2 | 679.6 | 244 | SEG95 | -1566.0 | 679.6 |
| 185 | SEG36 | 1566.0 | 679.6 | 245 | SEG96 | -1618.2 | 679.6 |
| 186 | SEG37 | 1513.8 | 679.6 | 246 | SEG97 | -1670.4 | 679.6 |
| 187 | SEG38 | 1461.6 | 679.6 | 247 | SEG98 | -1722.6 | 679.6 |
| 188 | SEG39 | 1409.4 | 679.6 | 248 | SEG99 | -1774.8 | 679.6 |
| 189 | SEG40 | 1357.2 | 679.6 | 249 | SEG100 | -1827.0 | 679.6 |
| 190 | SEG41 | 1305.0 | 679.6 | 250 | SEG101 | -1879.2 | 679.6 |
| 191 | SEG42 | 1252.8 | 679.6 | 251 | SEG102 | -1931.4 | 679.6 |
| 192 | SEG43 | 1200.6 | 679.6 | 252 | SEG103 | -1983.6 | 679.6 |
| 193 | SEG44 | 1148.4 | 679.6 | 253 | SEG104 | -2035.8 | 679.6 |
| 194 | SEG45 | 1096.2 | 679.6 | 254 | SEG105 | -2088.0 | 679.6 |
| 195 | SEG46 | 1044.0 | 679.6 | 255 | SEG106 | -2140.2 | 679.6 |
| 196 | SEG47 | 991.8 | 679.6 | 256 | SEG107 | -2192.4 | 679.6 |
| 197 | SEG48 | 939.6 | 679.6 | 257 | SEG108 | -2244.6 | 679.6 |
| 198 | SEG49 | 887.4 | 679.6 | 258 | SEG109 | -2296.8 | 679.6 |
| 199 | SEG50 | 835.2 | 679.6 | 259 | SEG110 | -2349.0 | 679.6 |
| 200 | SEG51 | 783.0 | 679.6 | 260 | SEG111 | -2401.2 | 679.6 |
| 201 | SEG52 | 730.8 | 679.6 | 261 | SEG112 | -2453.4 | 679.6 |
| 202 | SEG53 | 678.6 | 679.6 | 262 | SEG113 | -2505.6 | 679.6 |
| 203 | SEG54 | 626.4 | 679.6 | 263 | SEG114 | -2557.8 | 679.6 |
| 204 | SEG55 | 574.2 | 679.6 | 264 | SEG115 | -2610.0 | 679.6 |
| 205 | SEG56 | 522.0 | 679.6 | 265 | SEG116 | -2662.2 | 679.6 |
| 206 | SEG57 | 469.8 | 679.6 | 266 | SEG117 | -2714.4 | 679.6 |
| 207 | SEG58 | 417.6 | 679.6 | 267 | SEG118 | -2766.6 | 679.6 |
| 208 | SEG59 | 365.4 | 679.6 | 268 | SEG119 | -2818.8 | 679.6 |
| 209 | SEG60 | 313.2 | 679.6 | 269 | SEG120 | -2871.0 | 679.6 |
| 210 | SEG61 | 261.0 | 679.6 | 270 | SEG121 | -2923.2 | 679.6 |
| 211 | SEG62 | 208.8 | 679.6 | 271 | SEG122 | -2975.4 | 679.6 |
| 212 | SEG63 | 156.6 | 679.6 | 272 | SEG123 | -3027.6 | 679.6 |
| 213 | SEG64 | 104.4 | 679.6 | 273 | SEG124 | -3079.8 | 679.6 |
| 214 | SEG65 | 52.2 | 679.6 | 274 | SEG125 | -3132.0 | 679.6 |
| 215 | SEG66 | 0.0 | 679.6 | 275 | SEG126 | -3184.2 | 679.6 |
| 216 | SEG67 | -52.2 | 679.6 | 276 | SEG127 | -3236.4 | 679.6 |
| 217 | SEG68 | -104.4 | 679.6 | 277 | SEG128 | -3288.6 | 679.6 |
| 218 | SEG69 | -156.6 | 679.6 | 278 | SEG129 | -3340.8 | 679.6 |
| 219 | SEG70 | -208.8 | 679.6 | 279 | SEG130 | -3393.0 | 679.6 |
| 220 | SEG71 | -261.0 | 679.6 | 280 | SEG131 | -3445.2 | 679.6 |
| 221 | SEG72 | -365.4 | 679.6 | 281 | COM1 | -3654.0 | 679.6 |
| 222 | SEG73 | -417.6 | 679.6 | 282 | COM3 | -3705.8 | 679.6 |
| 223 | SEG74 | -469.8 | 679.6 | 283 | COM5 | -3757.6 | 679.6 |
| 224 | SEG75 | -522.0 | 679.6 | 284 | COM7 | -3809.4 | 679.6 |
| 225 | SEG76 | -574.2 | 679.6 | 285 | COM9 | -3861.2 | 679.6 |
| 226 | SEG77 | -626.4 | 679.6 | 286 | COM11 | -3913.0 | 679.6 |
| 227 | SEG78 | -678.6 | 679.6 | 287 | COM13 | -3964.8 | 679.6 |
| 228 | SEG79 | -730.8 | 679.6 | 288 | COM15 | -4016.6 | 679.6 |
| 229 | SEG80 | -783.0 | 679.6 | 289 | COM17 | -4068.4 | 679.6 |
| 230 | SEG81 | -835.2 | 679.6 | 290 | COM19 | -4120.2 | 679.6 |
| 231 | SEG82 | -887.4 | 679.6 | 291 | COM21 | -4172.0 | 679.6 |
| 232 | SEG83 | -939.6 | 679.6 | 292 | COM23 | -4223.8 | 679.6 |
| 233 | SEG84 | -991.8 | 679.6 | 293 | COM25 | -4275.6 | 679.6 |
| 234 | SEG85 | -1044.0 | 679.6 | 294 | COM27 | -4327.4 | 679.6 |
| 235 | SEG86 | -1096.2 | 679.6 | 295 | COM29 | -4379.2 | 679.6 |
| 236 | SEG87 | -1148.4 | 679.6 | 296 | COM31 | -4431.0 | 679.6 |
| 237 | SEG88 | -1200.6 | 679.6 | 297 | NC | -4483.2 | 679.6 |
| 238 | SEG89 | -1252.8 | 679.6 | 298 | NC | -4535.4 | 679.6 |
| 239 | SEG90 | -1305.0 | 679.6 | | | | |
| 240 | SEG91 | -1357.2 | 679.6 | | | | |


Figure 3 - SSD1303Z Alignment mark dimensions

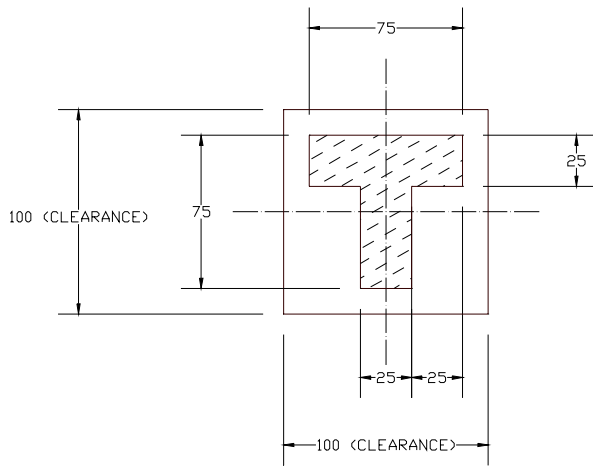

T shape

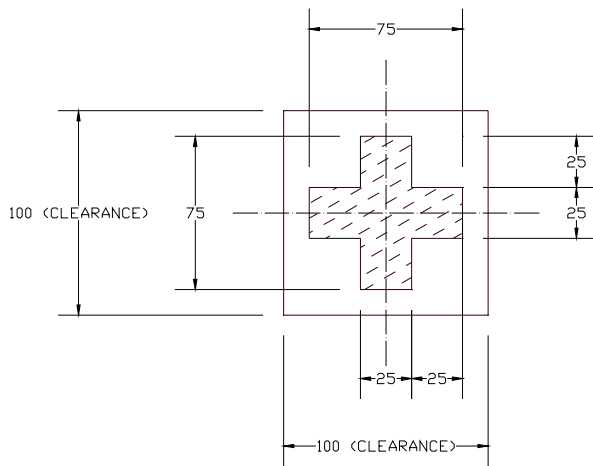

+ shape

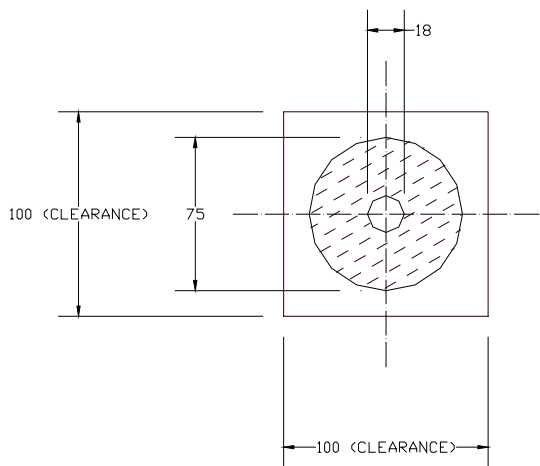

Circle

Unit in um

6 PIN DESCRIPTION

CL

This pin is the system clock input. When internal clock is enabled, this pin should be left open. The internal clock is output from this pin. When internal oscillator is disabled, this pin receives display clock signal from external clock source.

CLS

This is the internal clock enable pin. When it is pulled HIGH, internal clock is enabled. When it is pulled LOW, the internal clock is disabled, an external clock source must be connected to the CL pin for normal operation.

BS0, BS1, BS2

These are MCU interface input selection pins. See the following table for selecting different interfaces:

| | 6800-parallel interface | 8080-parallel interface | Serial interface |
|-----|-------------------------|-------------------------|------------------|
| BS0 | 0 | 0 | 0 |
| BS1 | 0 | 1 | 0 |
| BS2 | 1 | 1 | 0 |

CS#

This pin is the chip select input. The chip is enabled for MCU communication only when CS# had been pulled low.

RES#

This is a reset signal input pin. When it is pulled LOW, initialization of the chip is executed.

D/C

This is the Data/Command control pin. When it is pulled HIGH, the input at D₇-D₀ is treated as display data. When it is pulled LOW, the input at D₇-D₀ is transferred to the command registers. For detail relationship to MCU interface signals, please refer to the Timing Characteristics Diagrams.

R/W (WR#)

This is a MCU interface input pin. When 6800-series Parallel Interface mode is selected, this pin is used as Read/Write (R/W) selection input. Pull this pin to HIGH for read mode and pull it to LOW for write mode. When 8080-series Parallel Interface mode is selected, this pin is used as Write (WR#) selection input. Pull this pin to LOW for write mode. Data write operation is initiated when this pin is pulled LOW and the CS# is pulled LOW.

E (RD#)

This is a MCU interface input pin. When 6800-series Parallel Interface is selected, this pin is used as Enable (E) signal. Read/Write operation is initiated when this pin is pulled HIGH and the CS# pin is pulled LOW. When 8080-series Parallel Interface is selected, this pin is used to receive the Read Data (RD#) signal. Data read operation is initiated when this pin is pulled LOW and CS# pin is pulled LOW.

D₇-D₀

These are 8-bit bi-directional data bus to be connected to the microprocessor's data bus. When serial interface mode is selected, D₁ will be the serial data input, SDIN, D₀ will be the serial clock input, SCLK, and D₂ should be left opened.

VDD

This is a voltage supply pin. It must be connected to external source.

VSS

This is a ground pin. It also acts as a reference for the logic pins and the OLED driving voltages. It must be connected to external ground.

BGGND

This is a ground pin for analog circuits. It must be connected to external ground

VCC

This is the most positive voltage supply pin of the chip. It should be supplied externally.

VREF

This is a voltage reference pin for pre-charge voltage in driving OLED device. Voltage should be set to match with the OLED driving voltage in current drive phase. It can either be supplied externally or by connecting to VCC.

IREF

This is a segment current reference pin. A resistor should be connected between this pin and V_{SS} . Set the current at 10uA.

VCOMH

This is an input pin for the voltage output high level for COM signals. A capacitor should be connected between this pin and VSS.

VDDB This is a power supply pin for the internal buffer of the DC-DC voltage converter. It must be connected to V_{DD} when the converter is used.

VSSB

This is a ground pin for the internal buffer of the DC-DC voltage converter. It must be connected to V_{SS} when the converter is used.

GDR

This is an output pin drives the gate of the external NMOS of the booster circuit.

RESE

This is a source current pin of the external NMOS of the booster circuit.

VB_{REF}

This is an internal voltage reference pin for booster circuit. A stabilization capacitor, typ. 1uF, should be connected to Vss.

FB

This is a feedback resistor input pin for the booster circuit. It is used to adjust the booster output voltage level, Vcc.

COM0-COM63

These are pins provided the Common switch signals to the OLED panel. They are in high impedance state when display is OFF.

SEG0-SEG131

These are pins provided the Segment switch signals to the OLED panel. They are in high impedance stage when display is OFF.

TR0-TR8, GPIO0, GPIO1, ICAS, M and DOF#

These are reserved pins. No connection necessary and should be left open individually.

VSL

This is a segment voltage reference pin. This pin should be connected to VSS externally.

VCL

This is a common voltage reference pin. This pin should be connected to VSS externally.

M/S

This pin must be connected to VDD to enable the chip.

NC

Dummy pad. Do not group or short NC pins together.

7 FUNCTIONAL BLOCK DESCRIPTIONS

7.1 Oscillator Circuit and Display Time Generator

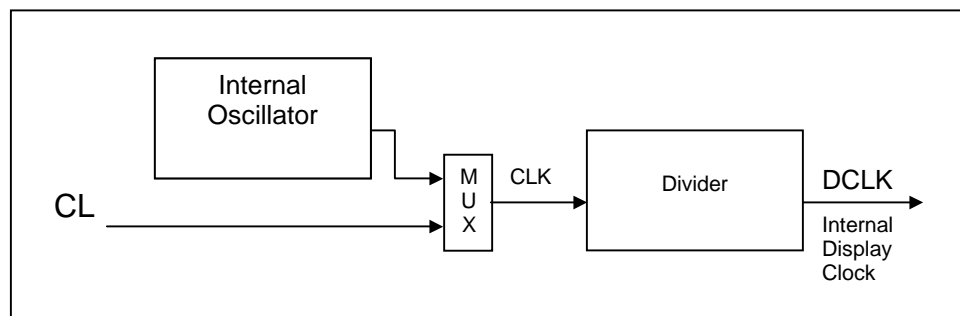


Figure 4 - Oscillator Circuit

This module is an On-Chip low power RC oscillator circuitry (Figure 4). The oscillator generates the clock for the Display Timing Generator.

7.2 Reset Circuit

When RES# pin is pulled LOW, the chip is initialized with the following status:

1. Display is OFF
2. 132 x 64 Display Mode
3. Normal segment and display data column address and row address mapping (SEG0 is mapped to column address 00H and COM0 is mapped to row address 00H)
4. Shift register data clear in serial interface
5. Display start line is set at display RAM address 0
6. Column address counter is set at 0
7. Normal scan direction of the COM outputs
8. Contrast control register is set at 80H
9. DC/DC enable

7.3 Command Decoder and Command Interface

This module determines whether the input data is interpreted as data or command. When the D/C# pin is pulled HIGH, the inputs at D₇-D₀ are interpreted as data and be written to Graphic Display Data RAM (GDDRAM). When it is pulled LOW, the inputs at D₇-D₀ are interpreted as command, they will be decoded and be written to the corresponding command registers.

7.4 MPU Parallel 6800-series Interface

The parallel interface consists of 8 bi-directional data pins (D₇-D₀), R/W (WR#), E (RD#), D/C, CS#. When the R/W (WR#) pin is pulled HIGH, Read operation from the Graphic Display Data RAM (GDDRAM) or the status register occurs. When the R/W (WR#) pin is pulled LOW, Write operation to Display Data RAM or Internal Command Registers occurs, depending on the status of D/C input. The E (RD#) input serves as data latch signal (clock) when HIGH provided that CS# is LOW. Refer to Parallel Interface Timing Diagram of 6800-series microprocessors.

In order to match the operating frequency of display RAM with that of the microprocessor, some pipeline processing is internally performed, which requires the insertion of a dummy read before the first actual display data read. This is shown in Figure 5 below.

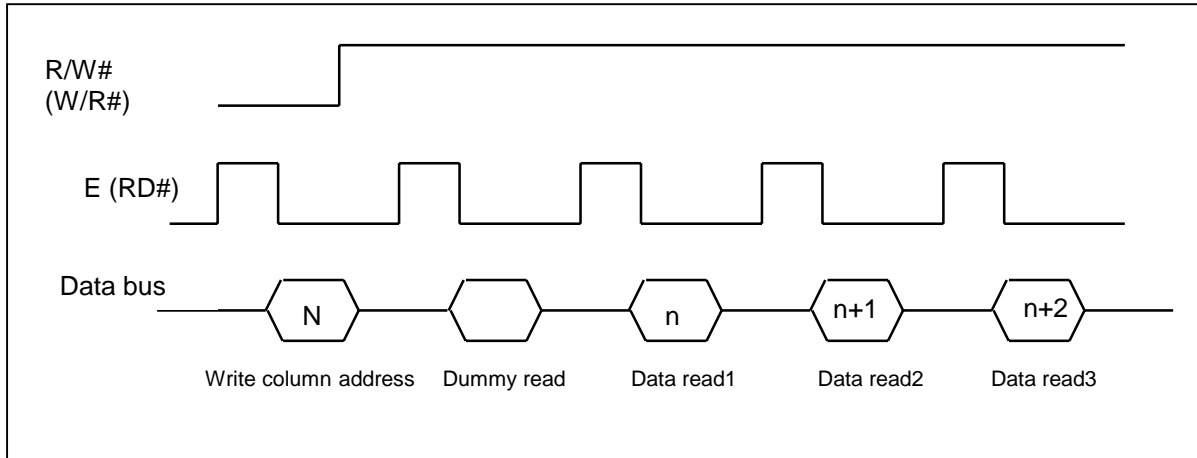


Figure 5 - Display data read back procedure - insertion of dummy read

7.5 MPU Parallel 8080-series Interface

The parallel interface consists of 8 bi-directional data pins (D₇-D₀), R/W (WR#), E (RD#), D/C, CS#. The E (RD#) input serves as data read latch signal (clock) when it is LOW provided that CS# is LOW. Display data or status register read is controlled by D/C signal.

R/W (WR#) input serves as data write latch signal (clock) when it is HIGH and provided that CS# is LOW. Display data or command register write is controlled by D/C. Refer to Parallel Interface Timing Diagram of 8080-series microprocessor. Similar to 6800-series interface, a dummy read is also required before the first actual display data read.


7.6 MPU Serial Interface

The serial interface consists of serial clock SCLK, serial data SDIN, D/C#, CS#. In SPI mode, D0 acts as SCLK, D1 acts as SDIN. For the unused data pins, D2 should be left open. D3 to D7, E and R/W pins can be connected to external ground.

SDIN is shifted into an 8-bit shift register on every rising edge of SCLK in the order of D₇, D₆, ... D₀. D/C# is sampled on every eighth clock and the data byte in the shift register is written to the Display Data RAM or command register in the same clock.

During data writing, an additional NOP command should be inserted before the CS# goes high (Refer to Figure 6).

Figure 6 – Display data write procedure in SPI mode

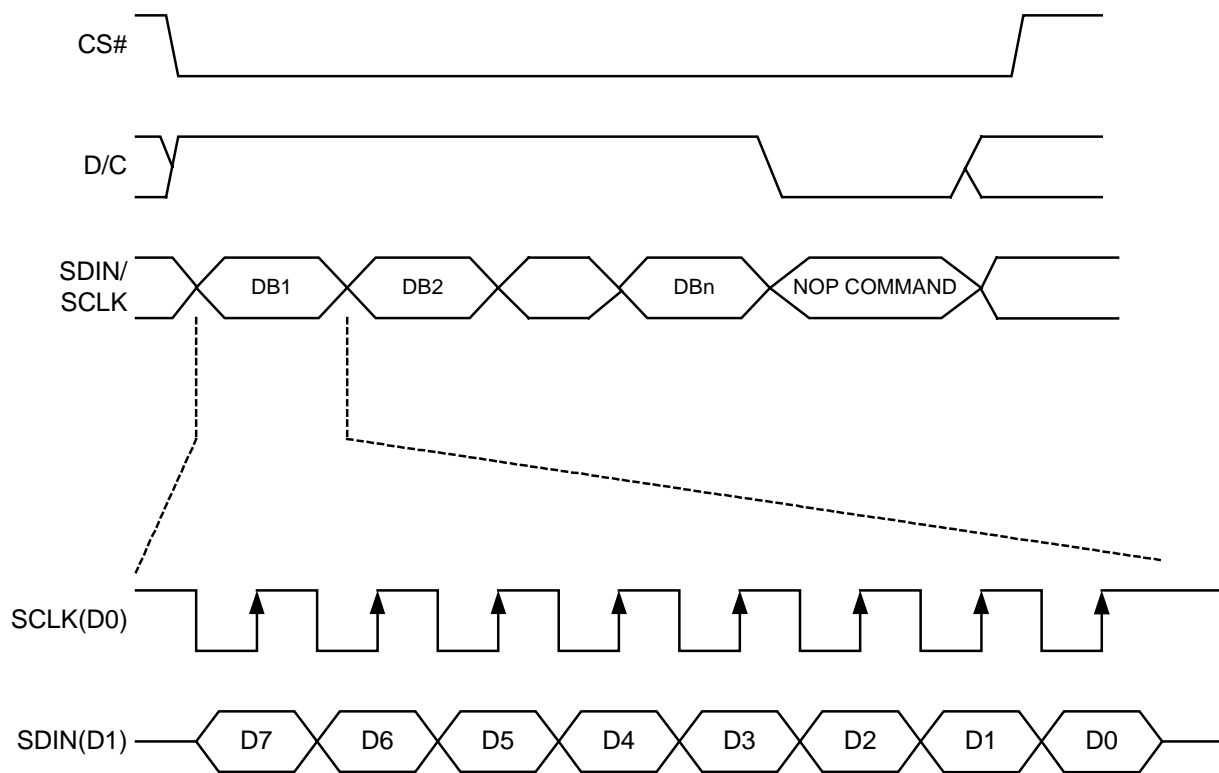

7.7 Graphic Display Data RAM (GDDRAM)

The GDDRAM is a bit mapped static RAM holding the bit pattern to be displayed. The size of the RAM is 132 x 64 bits. For mechanical flexibility, re-mapping on both Segment and Common outputs can be selected by software.

For vertical scrolling of the display, an internal register storing display start line can be set to control the portion of the RAM data to be mapped to the display.

7.8 Current Control and Voltage Control


This block is used to derive the incoming power sources into different levels of internal use voltage and current. VCC and VDD are external power supplies. VREF is reference voltage, which is used to derive the driving voltage for segments and commons. IREF is a reference current source for segment current drivers.

7.9 Segment Drivers / Common Drivers

Segment drivers deliver 132 current sources to drive OLED panel. The driving current can be adjusted from 0 to 300uA with 256 steps. Common drivers generate voltage scanning pulses.

7.10 Area Colour Decoder


Page 0 and Page 1 of the display are divided into 32 banks. Bank16 and Bank32 comprise of a display area of 12 x 8 pixels. Other banks (0~15 & 17~31) have matrices of 8 x 8 pixels. Each bank can be programmed to any one of the four colours (colour A, B, C, D). Detailed operation can be referred to the Command Table.

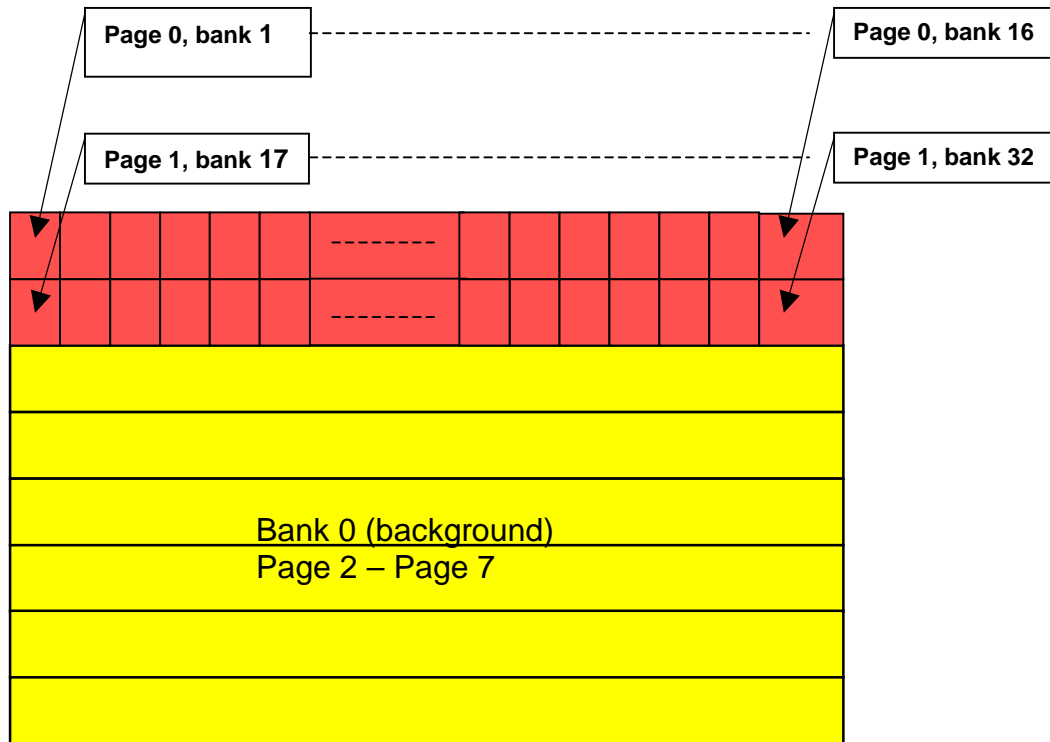

7.11DC-DC Voltage Converter

It is a switching voltage generator circuit, designed for handheld applications. In SSD1303, internal DC-DC voltage converter accompanying with an external application circuit (shown in below figure) can generate a high voltage supply V_{CC} from a low voltage supply input V_{DD} . V_{CC} is the voltage supply to the OLED driver block. Below application circuit is an example for the input voltage of 3V V_{DD} to generate V_{CC} of 12V @0mA ~ 20mA application.

Figure 7 - DC-DC voltage converter circuit

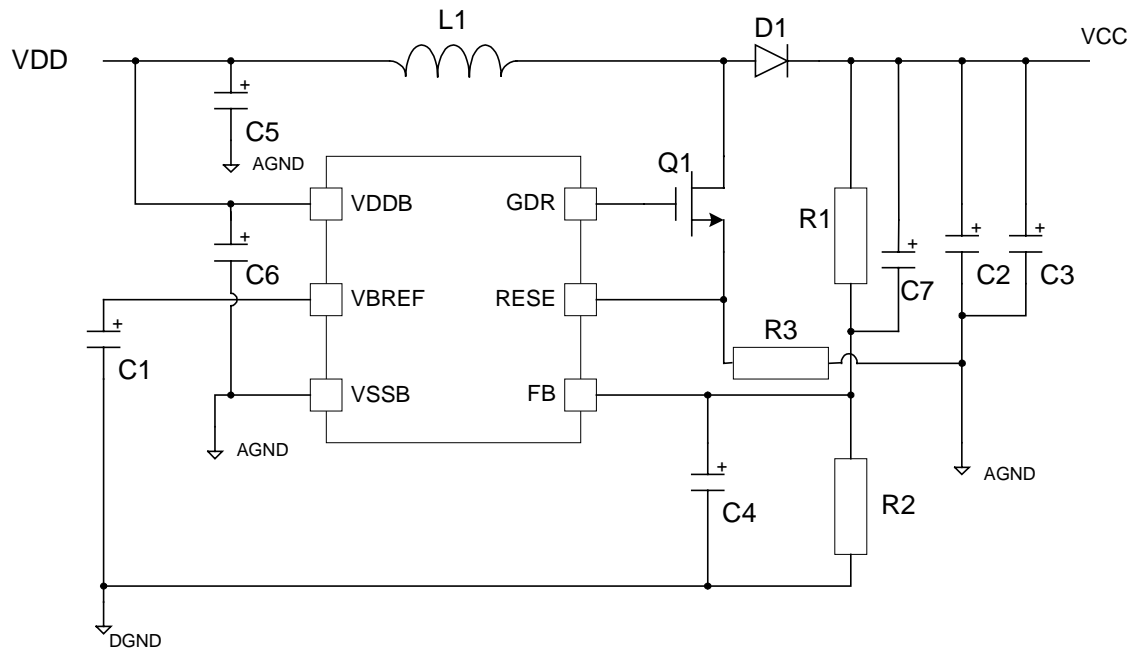

Remark:

1. $VSSB$ is tied to VSS on SSD1303T3 package.
2. $L1$, $D1$, $Q1$, $C5$ should be grouped closed together on PCB layout.
3. $R1$, $R2$, $C1$, $C4$ should be grouped closed together on PCB layout.
4. The V_{CC} output voltage level can be adjusted by $R1$ and $R2$, the reference formula is:

$$V_{CC} = 1.2 \times (R1+R2) / R2$$
 The value of $(R1+R2)$ should be between 500k to 1M Ohm.

Table 3 - Passive component selection:

| Components | Typical Value | Remark |
|------------|----------------------------|--|
| L1 | Inductor, 10 μ H | 1A |
| D1 | Schottky diode | 1A, 25V e.g. 1N5822, BAT54 [Philips Semiconductors] |
| Q1 | MOSFET | N-FET with low $R_{DS(on)}$ and low V_{th} voltage. e.g. MGSF1N02LT1 [ON SEMI] |
| R1, R2 | Resistor | 1%, 1/10W |
| R3 | Resistor, 1.2 Ω | 1%, 1/2W |
| C1 | Capacitor, 1 μ F | 16V |
| C2 | Capacitor, 6.8 μ F | Low ESR, 25V |
| C3 | Capacitor, 1 μ F | 16V |
| C4 | Capacitor, 10nF | 16V |
| C5 | Capacitor, 1 ~ 10 μ F | 16V |
| C6 | Capacitor, 0.1 ~ 1 μ F | 16V |
| C7 | Capacitor, 15nF | 16V |

8 COMMAND TABLE

Table 4 - Command table

(D/C =0, R/W (WR#)=0, E (RD#)=1)

Note: commands marked with “**” are compatible to SSD1301

| D/C | Hex | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | Command | Description |
|-----|--------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|---|---|
| 0 | 00-0F | 0 | 0 | 0 | 0 | X ₃ | X ₂ | X ₁ | X ₀ | Set Lower Column Address ** | Set the lower nibble of the column address register using X ₃ X ₂ X ₁ X ₀ as data bits. The initial display line register is reset to 0000b after POR. |
| 0 | 10-1F | 0 | 0 | 0 | 1 | X ₃ | X ₂ | X ₁ | X ₀ | Set Higher Column Address ** | Set the higher nibble of the column address register using X ₃ X ₂ X ₁ X ₀ as data bits. The initial display line register is reset to 0000b after POR. |
| 0 | 26 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 0 | Horizontal scroll setup | <p>A[2:0] Set the number of column scroll per step Valid value: 001b, 010b, 011b, 100b</p> <p>B[2:0] Define start page address</p> <p>C[1:0] Set time interval between each scroll step in terms of frame frequency</p> <p>00b – 12 frame 01b – 64 frames 10b – 128 frames 11b – 256 frames</p> <p>D[2:0] Define end page address Set the value of D[2:0] larger or equal to B[2:0]</p> |
| 0 | A[2:0] | * | * | * | * | * | A ₂ | A ₁ | A ₀ | | |
| 0 | B[2:0] | * | * | * | * | * | B ₂ | B ₁ | B ₀ | | |
| 0 | C[1:0] | * | * | * | * | * | * | C ₁ | C ₀ | | |
| 0 | D[2:0] | * | * | * | * | * | D ₂ | D ₁ | D ₀ | | |
| 0 | 2F | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 1 | Activate horizontal scroll | Start horizontal scrolling |
| 0 | 2E | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 0 | Deactivate horizontal scroll | Stop horizontal scrolling |
| 0 | 40-7F | 0 | 1 | X ₅ | X ₄ | X ₃ | X ₂ | X ₁ | X ₀ | Set Display Start Line | <p>Set display TAM display start line register from 0-63 using X₅X₃X₂X₁X₀.</p> <p>Display start line register is reset to 000000 during POR</p> |
| 0 | 81 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | Set Contrast Control Register ** | <p>Double byte command to select 1 out of 256 contrast steps. Contrast increases as the value increases. (POR = 80h)</p> |
| 0 | A[7:0] | A ₇ | A ₆ | A ₅ | A ₄ | A ₃ | A ₂ | A ₁ | A ₀ | | |
| 0 | 82 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | Brightness for color banks | <p>Double byte command to select 1 out of 256 brightness steps. Brightness increases as the value increases. (POR = 80h)</p> |
| 0 | A[7:0] | A ₇ | A ₆ | A ₅ | A ₄ | A ₃ | A ₂ | A ₁ | A ₀ | | |
| 0 | 91 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | Set Look Up Table (LUT) for area colour | <p>Set current drive pulse width of Bank 0, Colour A, B and C.</p> <p>Bank 0: X[5:0] = 0... 63; for pulse width set to 1 ~ 64 clocks (POR = 110001b)</p> <p>Colour A: A[5:0] same as above (POR = 111111b)</p> <p>Colour B: B[5:0] same as above (POR = 111111b)</p> <p>Colour C: C[5:0] same as above (POR = 111111b)</p> <p>Note: colour D pulse width is fixed at 64 clocks pulse .</p> |
| 0 | X[5:0] | * | * | X ₅ | X ₄ | X ₃ | X ₂ | X ₁ | X ₀ | | |
| 0 | A[5:0] | * | * | A ₅ | A ₄ | A ₃ | A ₂ | A ₁ | A ₀ | | |
| 0 | B[5:0] | * | * | B ₅ | B ₄ | B ₃ | B ₂ | B ₁ | B ₀ | | |
| 0 | C[5:0] | * | * | C ₅ | C ₄ | C ₃ | C ₂ | C ₁ | C ₀ | | |

| D/C | Hex | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | Command | Description |
|-----|--------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--|--|
| 0 | 92 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | Set bank colour of for bank 1-16 (Page 0) | A[1:0] : 00, 01, 10, or 11 for Colour = A, B, C or D of bank 1 A[3:2] : 00, 01, 10, or 11 for Colour = A, B, C or D of bank 2 : : D[7:6]: 00, 01, 10, or 11 for Colour = A, B, C or D of bank 16 |
| 0 | A[7:0] | A ₇ | A ₆ | A ₅ | A ₄ | A ₃ | A ₂ | A ₁ | A ₀ | | |
| 0 | B[7:0] | B ₇ | B ₆ | B ₅ | B ₄ | B ₃ | B ₂ | B ₁ | B ₀ | | |
| 0 | C[7:0] | C ₇ | C ₆ | C ₅ | C ₄ | C ₃ | C ₂ | C ₁ | C ₀ | | |
| 0 | D[7:0] | D ₇ | D ₆ | D ₅ | D ₄ | D ₃ | D ₂ | D ₁ | D ₀ | | |
| 0 | 93 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | Set bank colour of for bank 17-32 (Page 1) | A[1:0] : 00, 01, 10, or 11 for Colour = A, B, C or D of bank 17 A[3:2] : 00, 01, 10, or 11 for Colour = A, B, C or D of bank 18 : : D[7:6]: 00, 01, 10, or 11 for Colour = A, B, C or D of bank 32 |
| 0 | A[7:0] | A ₇ | A ₆ | A ₅ | A ₄ | A ₃ | A ₂ | A ₁ | A ₀ | | |
| 0 | B[7:0] | B ₇ | B ₆ | B ₅ | B ₄ | B ₃ | B ₂ | B ₁ | B ₀ | | |
| 0 | C[7:0] | C ₇ | C ₆ | C ₅ | C ₄ | C ₃ | C ₂ | C ₁ | C ₀ | | |
| 0 | D[7:0] | D ₇ | D ₆ | D ₅ | D ₄ | D ₃ | D ₂ | D ₁ | D ₀ | | |
| 0 | A0~A1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | X ₀ | Set Segment Re-map ** | X ₀ =0: column address 0 is mapped to SEG0 (POR) X ₀ =1: column address 131 is mapped to SEG0 |
| 0 | A4~A5 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | X ₀ | Set Entire Display ON/OFF ** | X ₀ =0: normal display (POR) X ₀ =1: entire display ON |
| 0 | A6~A7 | 1 | 0 | 1 | 0 | 0 | 1 | 1 | X ₀ | Set Normal/Inverse Display ** | X ₀ =0: normal display (POR) X ₀ =1: inverse display |
| 0 | A8 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | Set Multiplex Ratio ** | The next command, A[5:0] determines multiplex ratio N from 16MUX-64MUX, POR= 64MUX |
| 0 | A[5:0] | * | * | A ₅ | A ₄ | A ₃ | A ₂ | A ₁ | A ₀ | | |
| 0 | AA | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | NOP | Reserved, do not use |
| 0 | AB | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 1 | NOP | Reserved, do not use |
| 0 | AD | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | Set DC-DC on/off | X ₀ : 1 DC-DC will be turned on when display on (POR) 0 DC-DC is disable |
| 0 | AE~AF | 1 | 0 | 1 | 0 | 1 | 1 | 1 | X ₀ | Set Display ON/OFF ** | X ₀ =0: turns OFF OLED panel (POR) X ₀ =1: turns ON OLED panel |
| 0 | B0~BF | 1 | 0 | 1 | 1 | X ₃ | X ₂ | X ₁ | X ₀ | Set Page Address ** | Set GDDRAM Page Address (0~7) for read/write using X ₃ X ₂ X ₁ X ₀ |
| 0 | C0/C8 | 1 | 1 | 0 | 0 | X ₃ | * | * | * | Set COM Output Scan Direction ** | X ₃ =0: normal mode (POR) Scan from COM 0 to COM [N -1] X ₃ =1: remapped mode. Scan from COM [N-1] to COM0 Where N is the Multiplex ratio. |
| 0 | D0-D1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | X ₀ | Reserved | Reserved, do not use |

| D/C | Hex | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | Command | Description |
|--------|--------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|--|--|
| 0 0 | D3 A[5:0] | 1 * | 1 * | 0 A ₅ | 1 A ₄ | 0 A ₃ | 0 A ₂ | 1 A ₁ | 1 A ₀ | Set Display Offset ** | Set vertical scroll by COM from 0-63. The value is reset to 00H after POR. |
| 0 0 | D5 A[7:0] | 1 A ₇ | 1 A ₆ | 0 A ₅ | 1 A ₄ | 0 A ₃ | 1 A ₂ | 0 A ₁ | 1 A ₀ | Set Display Clock Divide Ratio/Oscillator Frequency | A[3:0] Define the divide ratio of the display clocks (DCLK): Divide ratio= A[3:0] + 1, POR is 0000b (divide ratio = 1) A[7:4] Set the Oscillator Frequency. Oscillator Frequency increases with the value of A[7:4] and vice versa. POR is 0111b |
| 0 0 | D8 | 1 0 | 1 0 | 0 X ₅ | 1 X ₄ | 1 0 | 0 X ₂ | 0 0 | 0 X ₀ | Set area colour mode on/off & low power display mode | X ₅ X ₄ = 00 (POR) : mono mode X ₅ X ₄ = 11 Area Colour enable X ₂ =0 and X ₀ =0: Normal (POR) power mode X ₂ =1 and X ₀ =1: Set low power save mode |
| 0 0 | D9 A[7:0] | 1 A ₇ | 1 A ₆ | 0 A ₅ | 1 A ₄ | 1 A ₃ | 0 A ₂ | 0 A ₁ | 1 A ₀ | Set Pre-charge period** | A[3:0] Phase 1 period of up to 15 dclk clocks [POR=2h]; 0 is invalid entry A[7:4] Phase 2 period of up to 15 dclk clocks [POR=2h]; 0 is invalid entry |
| 0 0 | DA | 1 0 | 1 0 | 0 0 | 1 X ₄ | 1 0 | 0 0 | 1 1 | 0 0 | Set COM pins hardware configuration | X ₄ =0, Sequential COM pin configuration (i.e. COM31, 30, 29....0 ; SEG0-132; COM31,32....62,63) X ₄ =1(POR), Alternative COM pin configuration (i.e. COM62,60,58,...2,0; SEG0-132; COM1,3,5...61,63) |
| 0 0 | DB A[6:0] | 1 * | 1 A ₆ | 0 A ₅ | 1 A ₄ | 1 A ₃ | 0 A ₂ | 1 A ₁ | 1 A ₀ | Set VCOM Deselect Level | A[6:0] 0000000 low VCOM deselect level (~ 0.43 Vref) 0110101 normal VCOM deselect level (~ 0.77*Vref (POR)) 1111111 high VCOM deselect level (equal Vref) |
| 0 | E2 | 1 | 1 | 1 | 0 | 0 | 0 | 1 | 0 | Reserved | Reserved |
| 0 | E3 | 1 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | NOP ** | Command for No Operation |
| 0 | F* | 1 | 1 | 1 | 1 | * | * | * | * | Reserved | Reserved, do not use |

Note: Remark “**” stands for “Don’t Care”

Table 5 - Read command table

(D/C=0, R/W (WR#)=1, E (RD#)=1 for 6800 or E (RD#)=0 for 8080)

| Bit Pattern | Command | Description |
|---|------------------------|---|
| D ₇ D ₆ D ₅ D ₄ D ₃ D ₂ D ₁ D ₀ | Status Register Read * | D ₇ : Reserve D ₆ : "1" for display OFF / "0" for display ON D ₅ : Reserve D ₄ : Reserve D ₃ : Reserve D ₂ : Reserve D ₁ : Reserve D ₀ : Reserve |

Note: Patterns other than that given in Command Table are prohibited to enter to the chip as a command; otherwise, unexpected result will occur.

8.1 Data Read / Write

To read data from the GDDRAM, input HIGH to R/W (WR#) pin and D/C pin for 6800-series parallel mode, LOW to E (RD#) pin and HIGH to D/C# pin for 8080-series parallel mode. No data read is provided in serial mode operation.

In normal data read mode, GDDRAM column address pointer will be increased by one automatically after each data read.

Also, a dummy read is required before the first data read. See Figure 5 in Functional Block Description.

To write data to the GDDRAM, input LOW to R/W (WR#) pin and HIGH to D/C pin for 6800-series parallel mode AND 8080-series parallel mode. For serial interface mode, it is always in write mode. GDDRAM column address pointer will be increased by one automatically after each data write.

Table 6 - Address increment table (Automatic)

| D/C | R/W (WR#) | Comment | Address Increment |
|-----|-----------|---------------|-------------------|
| 0 | 0 | Write Command | No |
| 0 | 1 | Read Status | No |
| 1 | 0 | Write Data | Yes |
| 1 | 1 | Read Data | Yes*1 |

*1. If read-data command is issued in read-modify-write mode, address increase is not applied.

9 COMMAND DESCRIPTIONS

Set Lower Column Address

This command specifies the lower nibble of the 8-bit column address of the display data RAM. The column address will be incremented by each data access after it is pre-set by the MCU.

Set Higher Column Address

This command specifies the higher nibble of the 8-bit column address of the display data RAM. The column address will be incremented by each data access after it is pre-set by the MCU.

Activate Horizontal Scroll

Start motion of horizontal scrolling. This command should only be issued after Horizontal scroll setup parameters are defined.

The following actions are prohibited after the horizontal scroll is activated

1. RAM access (Data write or read)
2. Changing horizontal scroll setup parameters

The SSD1303 horizontal scroll is designed for 128 columns scrolling only. 4 remaining columns are reserved for computation and should be left open.

With column address 0 mapped to SEG0 (Segment remap setting = A0h), the 4 unused columns will be SEG128, SEG129, SEG130, SEG131.

With column address 0 mapped to SEG131 (Segment remap setting = A1h), the 4 unused columns will be SEG0, SEG1, SEG2, SEG3.

Figure 8 - Horizontal scroll direction

| REMAP SETTING | SEG0 | SEG1 | SEG2 | SEG3 | SEG4 | SEG5 | ... | ... | ... | SEG126 | SEG127 | SEG128 | SEG129 | SEG130 | SEG131 |
|---------------|--------------|------|------|------|------|------|-----|-----|-----|--------|--------|--------------|--------|--------|--------|
| A0 | A | B | C | D | E | F | → | → | → | Y | Z | Invalid data | | | |
| A1 | Invalid data | | | | Z | Y | ← | ← | ← | F | E | D | C | B | A |

Scroll direction

Deactivate Horizontal Scroll

Stop motion of horizontal scrolling.

Horizontal Scroll Setup

This command consists of 5 consecutive bytes to set up the horizontal scroll parameters. It determines the scrolling start page, end page and the scrolling speed.

Before issuing this command, the horizontal scroll must be deactivated (2Eh). Otherwise, ram content may be corrupted.


Set Display Start Line

This command is to set Display Start Line register to determine starting address of display RAM to be displayed by selecting a value from 0 to 63. With value equals to 0, D₀ of Page 0 is mapped to COM0. With value equals to 1, D₁ of Page0 is mapped to COM0. The display start line values of 0 to 63 are assigned to Page 0 to 7.

Set Contrast Control Register

This command is to set Contrast Setting of the display. The chip has 256 contrast steps from 00 to FF. The segment output current increases as the contrast step value increases. See Figure 9.

Figure 9 - Segment current vs Contrast setting

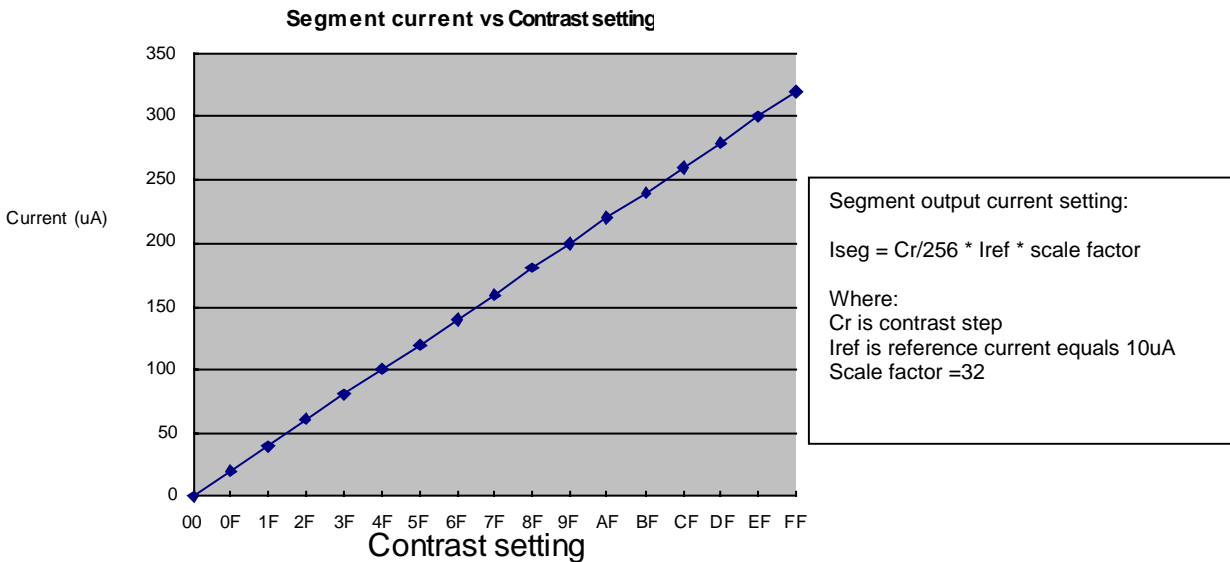

Set Brightness for Color Banks

This command is to set Brightness Setting of the display for area colors banks (except bank 0). The chip has 256 brightness steps from 00 to FF. The segment output current increases as the brightness step value increases

Set Look Up Table (LUT) for area colour

SSD1303 provides 4 colour (pulse width) settings - Colour A, B, C and D. The colour intensity (or grey scale) is defined by the current drive pulse width. The pulse width of colour A, B, C can be programmable from 1 to 64 DCLK* duration. The colour D is fixed at 64 DCLK pulse width. This colour setting has to be stored in the Look Up Table (LUT).

For the background colour, the colour intensity is defined by a variable X[5:0].

Set LUT command: 10010001
 X[5:0]
 A[5:0]
 B[5:0]
 C[5:0]

| | Description | Number of DCLKs |
|----------|-----------------------------------|-----------------|
| Bank 0 | Set background colour | X[5:0] |
| Colour A | Set Pulse Width A | A[5:0] |
| Colour B | Set Pulse Width B | B[5:0] |
| Colour C | Set Pulse Width C | C[5:0] |
| Colour D | Pulse width D is fixed to 64 DCLK | 64 (fixed) |

DCLK: Internal Display Clock

Set bank colour of bank 1-16 (Page 0) and bank colour of bank 17-32 (Page 1)

Next step is to define the colour of each display area. The 132x64 display matrix is divided into 8 pages of 8 commons per pages. The first two pages, page 0 and page 1, are divided into 32 banks: Bank16 and Bank32 comprise of a display area of 12x8 pixels. Other banks (0~15 & 17~31) have matrices of 8x8 pixels. Each bank can be programmable to any 1 of the 4 colour (A, B, C, D). User can use 92h and 93h command for the bank colour setting. Note: Only applicable in area colour mode.

Set Segment Re-map

This command changes the mapping between the display data column address and segment driver. It allows flexibility in OLED module design. Refer to Command Table.

Set Entire Display ON/OFF

This command forces the entire display to be "ON" regardless of the contents of the display data RAM. This command has priority over normal/reverse display. This command will be used with "Set Display ON/OFF" command to form a compound command for entering power save mode.

Set Normal/Inverse Display

This command sets the display to be either normal/inverse. In normal display, a RAM data of 1 indicates an "ON" pixel while in inverse display; a RAM data of 0 indicates an "ON" pixel.

Set Multiplex Ratio

This command switches default 63 multiplex mode to any multiplex ratio from 2 to 63. The output pads COM0-COM63 will be switched to corresponding COM signal.

Set DC-DC on/off

This command is to control the DC-DC voltage converter. The converter will be turned on by issuing this command then DISPLAY ON command. The panel display must be off while issuing this command. POR the DC-DC will be turned on.

Set Display ON/OFF

This command turns the display ON or OFF. When the display is OFF, the segment and common output are in high impedance state.

Set Page Address

This command positions the page address from 0 to 7 in GDDRAM. Refer to Command Table.

Set COM Output Scan Direction

This command sets the scan direction of the COM output allowing layout flexibility in OLED module design. In addition, the display will have immediate effect once this command is issued. That is, if this command is sent during normal display, the graphic display will be vertically flipped.

Set Display Offset

This is a double byte command. The next command specifies the mapping of display start line to one of COM0-63 (it is assumed that COM0 is the display start line, display start line register equals to 0).

For example, to move the COM16 towards the COM0 direction for 16 lines, the 6-bit data in the second byte should be given by 010000. To move in the opposite direction by 16 lines, the 6-bit data should be given by (64 – 16) and so the second byte should be 100000.

| Hardware pin name | Output | | | | | | | | | | | | Set MUX ratio(A8) COM Normal / Remapped (C0 / C8) Display offset (D3) Display start line (40 - 7F) |
|----------------------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|---|
| | 64 | | 64 | | 64 | | 56 | | 56 | | 56 | | |
| | Normal | | Normal | | Normal | | Normal | | Normal | | Normal | | |
| | 0 | 8 | 0 | 8 | 0 | 8 | 0 | 8 | 0 | 8 | 0 | 8 | |
| COM0 | Row0 | RAM0 | Row8 | RAM8 | Row0 | RAM8 | Row0 | RAM0 | Row8 | RAM8 | Row0 | RAM8 | |
| COM1 | Row1 | RAM1 | Row9 | RAM9 | Row1 | RAM9 | Row1 | RAM1 | Row9 | RAM9 | Row1 | RAM9 | |
| COM2 | Row2 | RAM2 | Row10 | RAM10 | Row2 | RAM10 | Row2 | RAM2 | Row10 | RAM10 | Row2 | RAM10 | |
| COM3 | Row3 | RAM3 | Row11 | RAM11 | Row3 | RAM11 | Row3 | RAM3 | Row11 | RAM11 | Row3 | RAM11 | |
| COM4 | Row4 | RAM4 | Row12 | RAM12 | Row4 | RAM12 | Row4 | RAM4 | Row12 | RAM12 | Row4 | RAM12 | |
| COM5 | Row5 | RAM5 | Row13 | RAM13 | Row5 | RAM13 | Row5 | RAM5 | Row13 | RAM13 | Row5 | RAM13 | |
| COM6 | Row6 | RAM6 | Row14 | RAM14 | Row6 | RAM14 | Row6 | RAM6 | Row14 | RAM14 | Row6 | RAM14 | |
| COM7 | Row7 | RAM7 | Row15 | RAM15 | Row7 | RAM15 | Row7 | RAM7 | Row15 | RAM15 | Row7 | RAM15 | |
| COM8 | Row8 | RAM8 | Row16 | RAM16 | Row8 | RAM16 | Row8 | RAM8 | Row16 | RAM16 | Row8 | RAM16 | |
| COM9 | Row9 | RAM9 | Row17 | RAM17 | Row9 | RAM17 | Row9 | RAM9 | Row17 | RAM17 | Row9 | RAM17 | |
| COM10 | Row10 | RAM10 | Row18 | RAM18 | Row10 | RAM18 | Row10 | RAM10 | Row18 | RAM18 | Row10 | RAM18 | |
| COM11 | Row11 | RAM11 | Row19 | RAM19 | Row11 | RAM19 | Row11 | RAM11 | Row19 | RAM19 | Row11 | RAM19 | |
| COM12 | Row12 | RAM12 | Row20 | RAM20 | Row12 | RAM20 | Row12 | RAM12 | Row20 | RAM20 | Row12 | RAM20 | |
| COM13 | Row13 | RAM13 | Row21 | RAM21 | Row13 | RAM21 | Row13 | RAM13 | Row21 | RAM21 | Row13 | RAM21 | |
| COM14 | Row14 | RAM14 | Row22 | RAM22 | Row14 | RAM22 | Row14 | RAM14 | Row22 | RAM22 | Row14 | RAM22 | |
| COM15 | Row15 | RAM15 | Row23 | RAM23 | Row15 | RAM23 | Row15 | RAM15 | Row23 | RAM23 | Row15 | RAM23 | |
| COM16 | Row16 | RAM16 | Row24 | RAM24 | Row16 | RAM24 | Row16 | RAM16 | Row24 | RAM24 | Row16 | RAM24 | |
| COM17 | Row17 | RAM17 | Row25 | RAM25 | Row17 | RAM25 | Row17 | RAM17 | Row25 | RAM25 | Row17 | RAM25 | |
| COM18 | Row18 | RAM18 | Row26 | RAM26 | Row18 | RAM26 | Row18 | RAM18 | Row26 | RAM26 | Row18 | RAM26 | |
| COM19 | Row19 | RAM19 | Row27 | RAM27 | Row19 | RAM27 | Row19 | RAM19 | Row27 | RAM27 | Row19 | RAM27 | |
| COM20 | Row20 | RAM20 | Row28 | RAM28 | Row20 | RAM28 | Row20 | RAM20 | Row28 | RAM28 | Row20 | RAM28 | |
| COM21 | Row21 | RAM21 | Row29 | RAM29 | Row21 | RAM29 | Row21 | RAM21 | Row29 | RAM29 | Row21 | RAM29 | |
| COM22 | Row22 | RAM22 | Row30 | RAM30 | Row22 | RAM30 | Row22 | RAM22 | Row30 | RAM30 | Row22 | RAM30 | |
| COM23 | Row23 | RAM23 | Row31 | RAM31 | Row23 | RAM31 | Row23 | RAM23 | Row31 | RAM31 | Row23 | RAM31 | |
| COM24 | Row24 | RAM24 | Row32 | RAM32 | Row24 | RAM32 | Row24 | RAM24 | Row32 | RAM32 | Row24 | RAM32 | |
| COM25 | Row25 | RAM25 | Row33 | RAM33 | Row25 | RAM33 | Row25 | RAM25 | Row33 | RAM33 | Row25 | RAM33 | |
| COM26 | Row26 | RAM26 | Row34 | RAM34 | Row26 | RAM34 | Row26 | RAM26 | Row34 | RAM34 | Row26 | RAM34 | |
| COM27 | Row27 | RAM27 | Row35 | RAM35 | Row27 | RAM35 | Row27 | RAM27 | Row35 | RAM35 | Row27 | RAM35 | |
| COM28 | Row28 | RAM28 | Row36 | RAM36 | Row28 | RAM36 | Row28 | RAM28 | Row36 | RAM36 | Row28 | RAM36 | |
| COM29 | Row29 | RAM29 | Row37 | RAM37 | Row29 | RAM37 | Row29 | RAM29 | Row37 | RAM37 | Row29 | RAM37 | |
| COM30 | Row30 | RAM30 | Row38 | RAM38 | Row30 | RAM38 | Row30 | RAM30 | Row38 | RAM38 | Row30 | RAM38 | |
| COM31 | Row31 | RAM31 | Row39 | RAM39 | Row31 | RAM39 | Row31 | RAM31 | Row39 | RAM39 | Row31 | RAM39 | |
| COM32 | Row32 | RAM32 | Row40 | RAM40 | Row32 | RAM40 | Row32 | RAM32 | Row40 | RAM40 | Row32 | RAM40 | |
| COM33 | Row33 | RAM33 | Row41 | RAM41 | Row33 | RAM41 | Row33 | RAM33 | Row41 | RAM41 | Row33 | RAM41 | |
| COM34 | Row34 | RAM34 | Row42 | RAM42 | Row34 | RAM42 | Row34 | RAM34 | Row42 | RAM42 | Row34 | RAM42 | |
| COM35 | Row35 | RAM35 | Row43 | RAM43 | Row35 | RAM43 | Row35 | RAM35 | Row43 | RAM43 | Row35 | RAM43 | |
| COM36 | Row36 | RAM36 | Row44 | RAM44 | Row36 | RAM44 | Row36 | RAM36 | Row44 | RAM44 | Row36 | RAM44 | |
| COM37 | Row37 | RAM37 | Row45 | RAM45 | Row37 | RAM45 | Row37 | RAM37 | Row45 | RAM45 | Row37 | RAM45 | |
| COM38 | Row38 | RAM38 | Row46 | RAM46 | Row38 | RAM46 | Row38 | RAM38 | Row46 | RAM46 | Row38 | RAM46 | |
| COM39 | Row39 | RAM39 | Row47 | RAM47 | Row39 | RAM47 | Row39 | RAM39 | Row47 | RAM47 | Row39 | RAM47 | |
| COM40 | Row40 | RAM40 | Row48 | RAM48 | Row40 | RAM48 | Row40 | RAM40 | Row48 | RAM48 | Row40 | RAM48 | |
| COM41 | Row41 | RAM41 | Row49 | RAM49 | Row41 | RAM49 | Row41 | RAM41 | Row49 | RAM49 | Row41 | RAM49 | |
| COM42 | Row42 | RAM42 | Row50 | RAM50 | Row42 | RAM50 | Row42 | RAM42 | Row50 | RAM50 | Row42 | RAM50 | |
| COM43 | Row43 | RAM43 | Row51 | RAM51 | Row43 | RAM51 | Row43 | RAM43 | Row51 | RAM51 | Row43 | RAM51 | |
| COM44 | Row44 | RAM44 | Row52 | RAM52 | Row44 | RAM52 | Row44 | RAM44 | Row52 | RAM52 | Row44 | RAM52 | |
| COM45 | Row45 | RAM45 | Row53 | RAM53 | Row45 | RAM53 | Row45 | RAM45 | Row53 | RAM53 | Row45 | RAM53 | |
| COM46 | Row46 | RAM46 | Row54 | RAM54 | Row46 | RAM54 | Row46 | RAM46 | Row54 | RAM54 | Row46 | RAM54 | |
| COM47 | Row47 | RAM47 | Row55 | RAM55 | Row47 | RAM55 | Row47 | RAM47 | Row55 | RAM55 | Row47 | RAM55 | |
| COM48 | Row48 | RAM48 | Row56 | RAM56 | Row48 | RAM56 | Row48 | RAM48 | - | - | Row48 | RAM56 | |
| COM49 | Row49 | RAM49 | Row57 | RAM57 | Row49 | RAM57 | Row49 | RAM49 | - | - | Row49 | RAM57 | |
| COM50 | Row50 | RAM50 | Row58 | RAM58 | Row50 | RAM58 | Row50 | RAM50 | - | - | Row50 | RAM58 | |
| COM51 | Row51 | RAM51 | Row59 | RAM59 | Row51 | RAM59 | Row51 | RAM51 | - | - | Row51 | RAM59 | |
| COM52 | Row52 | RAM52 | Row60 | RAM60 | Row52 | RAM60 | Row52 | RAM52 | - | - | Row52 | RAM60 | |
| COM53 | Row53 | RAM53 | Row61 | RAM61 | Row53 | RAM61 | Row53 | RAM53 | - | - | Row53 | RAM61 | |
| COM54 | Row54 | RAM54 | Row62 | RAM62 | Row54 | RAM62 | Row54 | RAM54 | - | - | Row54 | RAM62 | |
| COM55 | Row55 | RAM55 | Row63 | RAM63 | Row55 | RAM63 | Row55 | RAM55 | - | - | Row55 | RAM63 | |
| COM56 | Row56 | RAM56 | Row0 | RAM0 | Row56 | RAM0 | - | - | Row0 | RAM0 | - | - | |
| COM57 | Row57 | RAM57 | Row1 | RAM1 | Row57 | RAM1 | - | - | Row1 | RAM1 | - | - | |
| COM58 | Row58 | RAM58 | Row2 | RAM2 | Row58 | RAM2 | - | - | Row2 | RAM2 | - | - | |
| COM59 | Row59 | RAM59 | Row3 | RAM3 | Row59 | RAM3 | - | - | Row3 | RAM3 | - | - | |
| COM60 | Row60 | RAM60 | Row4 | RAM4 | Row60 | RAM4 | - | - | Row4 | RAM4 | - | - | |
| COM61 | Row61 | RAM61 | Row5 | RAM5 | Row61 | RAM5 | - | - | Row5 | RAM5 | - | - | |
| COM62 | Row62 | RAM62 | Row6 | RAM6 | Row62 | RAM6 | - | - | Row6 | RAM6 | - | - | |
| COM63 | Row63 | RAM63 | Row7 | RAM7 | Row63 | RAM7 | - | - | Row7 | RAM7 | - | - | |

| Hardware pin name | Output | | | | | | | | | | Set MUX ratio(A8) | | | |
|-------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------------|-------|---------------------------------|-------|
| | 64 | | 64 | | 64 | | 48 | | 48 | | 48 | | COM Normal / Remapped (C0 / C8) | |
| | Remap | | Remap | | Remap | | Remap | | Remap | | Remap | | Display offset (D3) | |
| | 0 | | 8 | | 0 | | 0 | | 8 | | 0 | | 8 | |
| | 0 | 8 | 0 | 8 | 0 | 8 | 0 | 8 | 0 | 8 | 0 | 8 | | |
| COM0 | Row63 | RAM63 | Row7 | RAM7 | Row63 | RAM7 | Row47 | RAM47 | - | - | Row47 | RAM41 | - | - |
| COM1 | Row62 | RAM62 | Row6 | RAM6 | Row62 | RAM6 | Row46 | RAM46 | - | - | Row46 | RAM40 | - | - |
| COM2 | Row61 | RAM61 | Row5 | RAM5 | Row61 | RAM5 | Row45 | RAM45 | - | - | Row45 | RAM41 | - | - |
| COM3 | Row60 | RAM60 | Row4 | RAM4 | Row60 | RAM4 | Row44 | RAM44 | - | - | Row44 | RAM42 | - | - |
| COM4 | Row59 | RAM59 | Row3 | RAM3 | Row59 | RAM3 | Row43 | RAM43 | - | - | Row43 | RAM43 | - | - |
| COM5 | Row58 | RAM58 | Row2 | RAM2 | Row58 | RAM2 | Row42 | RAM42 | - | - | Row42 | RAM44 | - | - |
| COM6 | Row57 | RAM57 | Row1 | RAM1 | Row57 | RAM1 | Row41 | RAM41 | - | - | Row41 | RAM45 | - | - |
| COM7 | Row56 | RAM56 | Row0 | RAM0 | Row56 | RAM0 | Row40 | RAM40 | - | - | Row40 | RAM46 | - | - |
| COM8 | Row55 | RAM55 | Row63 | RAM63 | Row55 | RAM63 | Row39 | RAM39 | Row47 | RAM47 | Row39 | RAM47 | Row47 | RAM63 |
| COM9 | Row54 | RAM54 | Row62 | RAM62 | Row54 | RAM62 | Row38 | RAM38 | Row46 | RAM46 | Row38 | RAM46 | Row46 | RAM62 |
| COM10 | Row53 | RAM53 | Row61 | RAM61 | Row53 | RAM61 | Row37 | RAM37 | Row45 | RAM45 | Row37 | RAM45 | Row45 | RAM61 |
| COM11 | Row52 | RAM52 | Row60 | RAM60 | Row52 | RAM60 | Row36 | RAM36 | Row44 | RAM44 | Row36 | RAM44 | Row44 | RAM60 |
| COM12 | Row51 | RAM51 | Row59 | RAM59 | Row51 | RAM59 | Row35 | RAM35 | Row43 | RAM43 | Row35 | RAM43 | Row43 | RAM59 |
| COM13 | Row50 | RAM50 | Row58 | RAM58 | Row50 | RAM58 | Row34 | RAM34 | Row42 | RAM42 | Row34 | RAM42 | Row42 | RAM58 |
| COM14 | Row49 | RAM49 | Row57 | RAM57 | Row49 | RAM57 | Row33 | RAM33 | Row41 | RAM41 | Row33 | RAM41 | Row41 | RAM57 |
| COM15 | Row48 | RAM48 | Row56 | RAM56 | Row48 | RAM56 | Row32 | RAM32 | Row40 | RAM40 | Row32 | RAM40 | Row40 | RAM56 |
| COM16 | Row47 | RAM47 | Row55 | RAM55 | Row47 | RAM55 | Row31 | RAM31 | Row39 | RAM39 | Row31 | RAM39 | Row39 | RAM55 |
| COM17 | Row46 | RAM46 | Row54 | RAM54 | Row46 | RAM54 | Row30 | RAM30 | Row38 | RAM38 | Row30 | RAM38 | Row38 | RAM54 |
| COM18 | Row45 | RAM45 | Row53 | RAM53 | Row45 | RAM53 | Row29 | RAM29 | Row37 | RAM37 | Row29 | RAM37 | Row37 | RAM53 |
| COM19 | Row44 | RAM44 | Row52 | RAM52 | Row44 | RAM52 | Row28 | RAM28 | Row36 | RAM36 | Row28 | RAM36 | Row36 | RAM52 |
| COM20 | Row43 | RAM43 | Row51 | RAM51 | Row43 | RAM51 | Row27 | RAM27 | Row35 | RAM35 | Row27 | RAM35 | Row35 | RAM51 |
| COM21 | Row42 | RAM42 | Row50 | RAM50 | Row42 | RAM50 | Row26 | RAM26 | Row34 | RAM34 | Row26 | RAM34 | Row34 | RAM50 |
| COM22 | Row41 | RAM41 | Row49 | RAM49 | Row41 | RAM49 | Row25 | RAM25 | Row33 | RAM33 | Row25 | RAM33 | Row33 | RAM49 |
| COM23 | Row40 | RAM40 | Row48 | RAM48 | Row40 | RAM48 | Row24 | RAM24 | Row32 | RAM32 | Row24 | RAM32 | Row32 | RAM48 |
| COM24 | Row39 | RAM39 | Row47 | RAM47 | Row39 | RAM47 | Row23 | RAM23 | Row31 | RAM31 | Row23 | RAM31 | Row31 | RAM47 |
| COM25 | Row38 | RAM38 | Row46 | RAM46 | Row38 | RAM46 | Row22 | RAM22 | Row30 | RAM30 | Row22 | RAM30 | Row30 | RAM46 |
| COM26 | Row37 | RAM37 | Row45 | RAM45 | Row37 | RAM45 | Row21 | RAM21 | Row29 | RAM29 | Row21 | RAM29 | Row29 | RAM45 |
| COM27 | Row36 | RAM36 | Row44 | RAM44 | Row36 | RAM44 | Row20 | RAM20 | Row28 | RAM28 | Row20 | RAM28 | Row28 | RAM44 |
| COM28 | Row35 | RAM35 | Row43 | RAM43 | Row35 | RAM43 | Row19 | RAM19 | Row27 | RAM27 | Row19 | RAM27 | Row27 | RAM43 |
| COM29 | Row34 | RAM34 | Row42 | RAM42 | Row34 | RAM42 | Row18 | RAM18 | Row26 | RAM26 | Row18 | RAM26 | Row26 | RAM42 |
| COM30 | Row33 | RAM33 | Row41 | RAM41 | Row33 | RAM41 | Row17 | RAM17 | Row25 | RAM25 | Row17 | RAM25 | Row25 | RAM41 |
| COM31 | Row32 | RAM32 | Row40 | RAM40 | Row32 | RAM40 | Row16 | RAM16 | Row24 | RAM24 | Row16 | RAM24 | Row24 | RAM40 |
| COM32 | Row31 | RAM31 | Row39 | RAM39 | Row31 | RAM39 | Row15 | RAM15 | Row23 | RAM23 | Row15 | RAM23 | Row23 | RAM39 |
| COM33 | Row30 | RAM30 | Row38 | RAM38 | Row30 | RAM38 | Row14 | RAM14 | Row22 | RAM22 | Row14 | RAM22 | Row22 | RAM38 |
| COM34 | Row29 | RAM29 | Row37 | RAM37 | Row29 | RAM37 | Row13 | RAM13 | Row21 | RAM21 | Row13 | RAM21 | Row21 | RAM37 |
| COM35 | Row28 | RAM28 | Row36 | RAM36 | Row28 | RAM36 | Row12 | RAM12 | Row20 | RAM20 | Row12 | RAM20 | Row20 | RAM36 |
| COM36 | Row27 | RAM27 | Row35 | RAM35 | Row27 | RAM35 | Row11 | RAM11 | Row19 | RAM19 | Row11 | RAM19 | Row19 | RAM35 |
| COM37 | Row26 | RAM26 | Row34 | RAM34 | Row26 | RAM34 | Row10 | RAM10 | Row18 | RAM18 | Row10 | RAM18 | Row18 | RAM34 |
| COM38 | Row25 | RAM25 | Row33 | RAM33 | Row25 | RAM33 | Row9 | RAM9 | Row17 | RAM17 | Row9 | RAM17 | Row17 | RAM33 |
| COM39 | Row24 | RAM24 | Row32 | RAM32 | Row24 | RAM32 | Row8 | RAM8 | Row16 | RAM16 | Row8 | RAM16 | Row16 | RAM32 |
| COM40 | Row23 | RAM23 | Row31 | RAM31 | Row23 | RAM31 | Row7 | RAM7 | Row15 | RAM15 | Row7 | RAM15 | Row15 | RAM31 |
| COM41 | Row22 | RAM22 | Row30 | RAM30 | Row22 | RAM30 | Row6 | RAM6 | Row14 | RAM14 | Row6 | RAM14 | Row14 | RAM30 |
| COM42 | Row21 | RAM21 | Row29 | RAM29 | Row21 | RAM29 | Row5 | RAM5 | Row13 | RAM13 | Row5 | RAM13 | Row13 | RAM29 |
| COM43 | Row20 | RAM20 | Row28 | RAM28 | Row20 | RAM28 | Row4 | RAM4 | Row12 | RAM12 | Row4 | RAM12 | Row12 | RAM28 |
| COM44 | Row19 | RAM19 | Row27 | RAM27 | Row19 | RAM27 | Row3 | RAM3 | Row11 | RAM11 | Row3 | RAM11 | Row11 | RAM27 |
| COM45 | Row18 | RAM18 | Row26 | RAM26 | Row18 | RAM26 | Row2 | RAM2 | Row10 | RAM10 | Row2 | RAM10 | Row10 | RAM26 |
| COM46 | Row17 | RAM17 | Row25 | RAM25 | Row17 | RAM25 | Row1 | RAM1 | Row9 | RAM9 | Row1 | RAM9 | Row9 | RAM25 |
| COM47 | Row16 | RAM16 | Row24 | RAM24 | Row16 | RAM24 | Row0 | RAM0 | Row8 | RAM8 | Row0 | RAM8 | Row8 | RAM24 |
| COM48 | Row15 | RAM15 | Row23 | RAM23 | Row15 | RAM23 | - | - | Row7 | RAM7 | - | - | Row7 | RAM23 |
| COM49 | Row14 | RAM14 | Row22 | RAM22 | Row14 | RAM22 | - | - | Row6 | RAM6 | - | - | Row6 | RAM22 |
| COM50 | Row13 | RAM13 | Row21 | RAM21 | Row13 | RAM21 | - | - | Row5 | RAM5 | - | - | Row5 | RAM21 |
| COM51 | Row12 | RAM12 | Row20 | RAM20 | Row12 | RAM20 | - | - | Row4 | RAM4 | - | - | Row4 | RAM20 |
| COM52 | Row11 | RAM11 | Row19 | RAM19 | Row11 | RAM19 | - | - | Row3 | RAM3 | - | - | Row3 | RAM19 |
| COM53 | Row10 | RAM10 | Row18 | RAM18 | Row10 | RAM18 | - | - | Row2 | RAM2 | - | - | Row2 | RAM18 |
| COM54 | Row9 | RAM9 | Row17 | RAM17 | Row9 | RAM17 | - | - | Row1 | RAM1 | - | - | Row1 | RAM17 |
| COM55 | Row8 | RAM8 | Row16 | RAM16 | Row8 | RAM16 | - | - | Row0 | RAM0 | - | - | Row0 | RAM16 |
| COM56 | Row7 | RAM7 | Row15 | RAM15 | Row7 | RAM15 | - | - | - | - | - | - | - | - |
| COM57 | Row6 | RAM6 | Row14 | RAM14 | Row6 | RAM14 | - | - | - | - | - | - | - | - |
| COM58 | Row5 | RAM5 | Row13 | RAM13 | Row5 | RAM13 | - | - | - | - | - | - | - | - |
| COM59 | Row4 | RAM4 | Row12 | RAM12 | Row4 | RAM12 | - | - | - | - | - | - | - | - |
| COM60 | Row3 | RAM3 | Row11 | RAM11 | Row3 | RAM11 | - | - | - | - | - | - | - | - |
| COM61 | Row2 | RAM2 | Row10 | RAM10 | Row2 | RAM10 | - | - | - | - | - | - | - | - |
| COM62 | Row1 | RAM1 | Row9 | RAM9 | Row1 | RAM9 | - | - | - | - | - | - | - | - |
| COM63 | Row0 | RAM0 | Row8 | RAM8 | Row0 | RAM8 | - | - | - | - | - | - | - | - |

Set Display Clock Divide Ratio/ Oscillator Frequency

This command is used to set the frequency of the internal display clocks, DCLKs. It is defined as the divide ratio (Value from 1 to 16) used to divide the oscillator frequency. POR is 1. Frame frequency is determined by divide ratio, number of display clocks per row, MUX ratio and oscillator frequency.

Set Area Colour Mode ON/OFF

This command is used to enable area colour mode. POR is mono mode.

Set Low Power Display Mode

This is a double byte command. This command is set to reduce power consumption during IC operation.

Set Pre-charge period

This command is used to set the duration of the pre-charge period. The interval is counted in number of DCLK. POR is 2 DCLK.

Set COM pins hardware configuration

This command is to set the COM signals pin configuration (sequential or alternative) to match the OLED panel hardware layout

Sequential COM pin configuration:

| | | |
|-------------------|-------------------|--------------------|
| COM31, 30, 29...0 | SEG0, 1, 2... 131 | COM32, 33, 34...63 |
|-------------------|-------------------|--------------------|

Alternative COM pin configuration (POR):

| | | |
|-------------------|-------------------|-----------------|
| COM62, 60, 58...0 | SEG0, 1, 2... 131 | COM1, 3, 5...63 |
|-------------------|-------------------|-----------------|

Set VCOM deselect level

This command is to set the COM pin output voltage level at deselect stage.

NOP

No Operation Command

Status register Read

This command is issued by setting D/C# LOW during a data read (refer to Figure 10 and Figure 11 for parallel interface waveform). It allows the MCU to monitor the internal status of the chip. No status read is provided for serial mode.

10 MAXIMUM RATINGS

Table 7 - Maximum Ratings

(Voltage Reference to V_{SS})

| Symbol | Parameter | Value | Unit |
|------------|-------------------------------|------------------------------|------|
| V_{DD} | Supply Voltage | -0.3 to +4.0 | V |
| V_{CC} | | 0.0 to 18.0 | V |
| V_{REF} | | 0.0 to 18.0 | V |
| V_{COMH} | Supply Voltage/Output voltage | 0.0 to 18.0 | V |
| - | SEG/COM output voltage | 0.0 to 18.0 | V |
| V_{in} | Input voltage | $V_{SS}-0.3$ to $V_{DD}+0.3$ | V |
| T_A | Operating Temperature | -40 to +90 | °C |
| T_{stg} | Storage Temperature Range | -65 to +150 | °C |

Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the limits in the Electrical Characteristics tables or Pin Description.

11 DC CHARACTERISTICS

Table 8 - DC Characteristics

(Unless otherwise specified, Voltage Referenced to V_{SS} , $V_{DD} = 2.4$ to $3.5V$, $T_A = 25^\circ C$)

| Symbol | Parameter | Test Condition | Min | Typ | Max | Unit |
|-----------------|--|---|--------------------|-----------|--------------------|---------|
| V_{CC} | Operating Voltage | - | 7 | 12 | 16 | V |
| V_{DD} | Logic Supply Voltage | - | 2.4 | - | 3.5 | V |
| V_{DD} | Logic Supply Voltage (internal DC/DC enable) | - | 3.0 | - | 3.5 | V |
| V_{OH} | High Logic Output Level | $I_{OUT} = 100\mu A, 3.3MHz$ | $0.9 \cdot V_{DD}$ | - | V_{DD} | V |
| V_{OL} | Low Logic Output Level | $I_{OUT} = 100\mu A, 3.3MHz$ | 0 | - | $0.1 \cdot V_{DD}$ | V |
| V_{IH} | High Logic Input Level | $I_{OUT} = 100\mu A, 3.3MHz$ | $0.8 \cdot V_{DD}$ | - | V_{DD} | V |
| V_{IL} | Low Logic Input Level | $I_{OUT} = 100\mu A, 3.3MHz$ | 0 | - | $0.2 \cdot V_{DD}$ | V |
| $I_{CC, SLEEP}$ | Sleep mode Current | $V_{DD}=2.7V$, display OFF, No panel attached | -10 | - | +10 | μA |
| $I_{DD, SLEEP}$ | Sleep mode Current | $V_{DD}=2.7V$, display OFF, No panel attached | -10 | - | +10 | μA |
| I_{CC} | V_{CC} Supply Current $V_{DD} = 2.7V$, $V_{CC} = 12V$, $I_{REF} = 10\mu A$ No loading, Display ON, All ON | Contrast = FF | - | 550 | - | μA |
| I_{DD} | V_{DD} Supply Current $V_{DD} = 2.7V$, $V_{CC} = 12V$, $I_{REF} = 10\mu A$ No loading, Display ON, All ON | Contrast = FF | - | 190 | - | μA |
| I_{SEG} | Segment Output Current $V_{DD}=2.7V$, $V_{CC}=12V$, $I_{REF}=10\mu A$, Display ON, Segment pin under test is connected with a 20K resistive load to VSS | Contrast=FF | 285 | 320 | 355 | μA |
| | | Contrast=AF | - | 220 | - | |
| | | Contrast=5F | - | 120 | - | |
| | | Contrast=0F | - | 20 | - | |
| Dev | Segment output current uniformity | $Dev = (I_{SEG} - I_{MID})/I_{MID}$ $I_{MID} = (I_{MAX} + I_{MIN})/2$ $I_{SEG}[0:131] =$ Segment current at contrast = FF | - | - | ± 3 | % |
| Adj. Dev | Adjacent pin output current uniformity (contrast = FF) | $Adj\ Dev = (I[n]-I[n+1]) / (I[n]+I[n+1])$ | - | ± 2.0 | - | % |
| V_{CC} | DC-DC converter output voltage | V_{DD} input=3V, L=22 μH ; R1=450Kohm; R2=50Kohm; I _{cc} = 20mA (loading) | 11.0 | 12.0 | 13.0 | V |
| | | - | 7 | - | 16 | |
| Pwr | DC-DC converter output power | V_{DD} input=3V, L=22 μH ; $V_{CC} = 12V$ | - | - | 400 | mW |

12 AC CHARACTERISTICS

Table 9 - AC Characteristics

(Unless otherwise specified, Voltage Referenced to V_{SS} , $V_{DD} = 2.4$ to $3.5V$, $T_A = 25^\circ C$.)

| Symbol | Parameter | Test Condition | Min | Typ | Max | Unit |
|-----------|---|--|-----|---|-----|------|
| F_{OSC} | Oscillation Frequency of Display Timing Generator | $V_{dd} = 2.7V$ | 315 | 360 | 420 | kHz |
| F_{FRM} | Frame Frequency for 64 MUX Mode | 132x64 Graphic Display Mode, Display ON, Internal Oscillator Enabled | - | $F_{OSC} \times 1/(D \times K \times 64)$ | - | Hz |
| RES# | Reset low pulse width | - | 3 | | | us |
| | Reset complete time | - | | | 2 | us |

D: divide ratio (default value = 1)

K: number of display clocks (default value = 54)

Refer to command table (set display clock divide ratio/oscillator freq) for detail description

Table 10 - 6800-Series MPU Parallel Interface Timing Characteristics

($V_{DD} - V_{SS} = 2.4$ to $3.5V$, $T_A = 25^\circ C$)

| Symbol | Parameter | Min | Typ | Max | Unit |
|-------------|---|-----------|-----|-----|------|
| t_{cycle} | Clock Cycle Time | 300 | - | - | ns |
| t_{AS} | Address Setup Time | 0 | - | - | ns |
| t_{AH} | Address Hold Time | 0 | - | - | ns |
| t_{DSW} | Write Data Setup Time | 40 | - | - | ns |
| t_{DHW} | Write Data Hold Time | 7 | - | - | ns |
| t_{DHR} | Read Data Hold Time | 20 | - | - | ns |
| t_{OH} | Output Disable Time | - | - | 70 | ns |
| t_{ACC} | Access Time | - | - | 140 | ns |
| PW_{CSL} | Chip Select Low Pulse Width (read) Chip Select Low Pulse Width (write) | 120 60 | - | - | ns |
| PW_{CSH} | Chip Select High Pulse Width (read) Chip Select High Pulse Width (write) | 60 60 | - | - | ns |
| t_R | Rise Time | - | - | 15 | ns |
| t_F | Fall Time | - | - | 15 | ns |

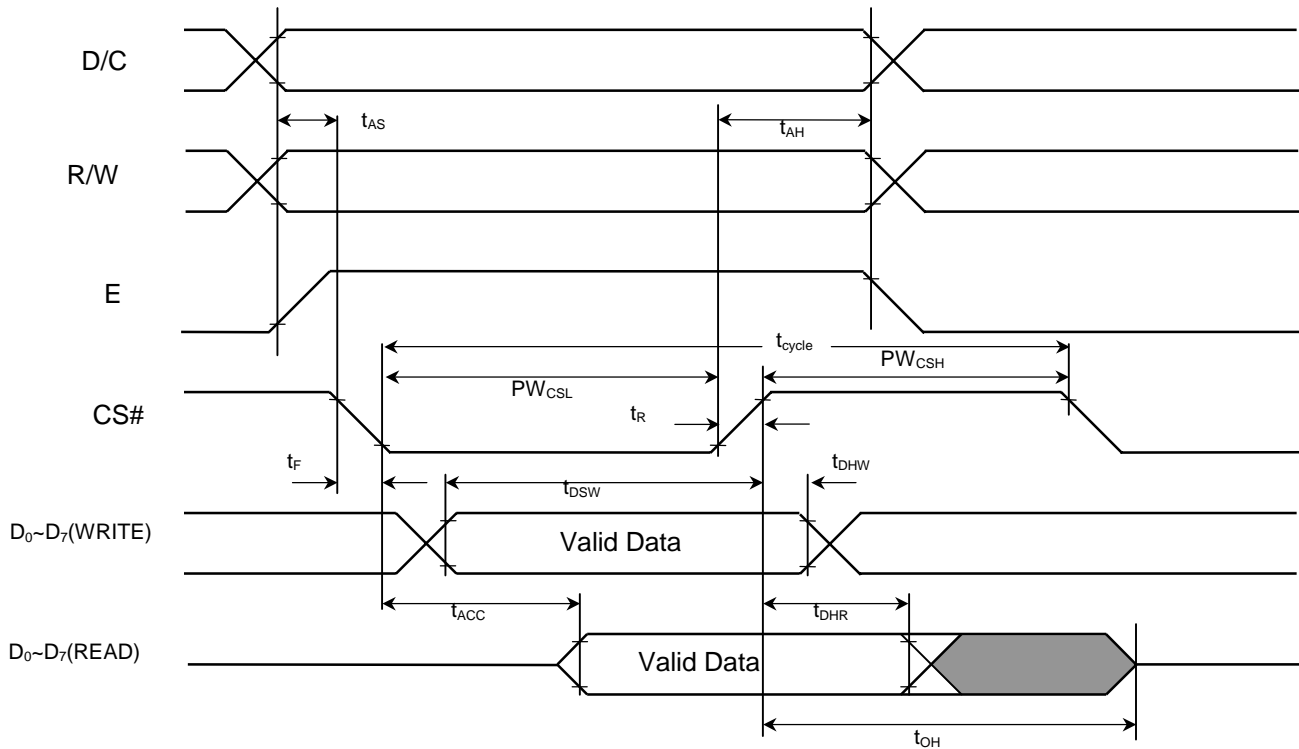


Figure 10 - 6800-series MPU parallel interface characteristics

Table 11 - 8080-Series MPU Parallel Interface Timing Characteristics

($V_{DD} - V_{SS} = 2.4$ to $3.5V$, $T_A = 25^\circ C$)

| Symbol | Parameter | Min | Typ | Max | Unit |
|-------------|--------------------------------------|-----|-----|-----|------|
| t_{cycle} | Clock Cycle Time | 300 | - | - | ns |
| t_{AS} | Address Setup Time | 0 | - | - | ns |
| t_{AH} | Address Hold Time | 0 | - | - | ns |
| t_{DSW} | Write Data Setup Time | 40 | - | - | ns |
| t_{DHW} | Write Data Hold Time | 7 | - | - | ns |
| t_{DHR} | Read Data Hold Time | 20 | - | - | ns |
| t_{OH} | Output Disable Time | - | - | 70 | ns |
| t_{ACC} | Access Time | - | - | 140 | ns |
| PW_{CSL} | Chip Select Low Pulse Width (read) | 120 | - | - | ns |
| PW_{CSH} | Chip Select High Pulse Width (read) | 60 | - | - | ns |
| PW_{CSL} | Chip Select Low Pulse Width (write) | 60 | - | - | ns |
| PW_{CSH} | Chip Select High Pulse Width (write) | 60 | - | - | ns |
| t_R | Rise Time | - | - | 15 | ns |
| t_F | Fall Time | - | - | 15 | ns |

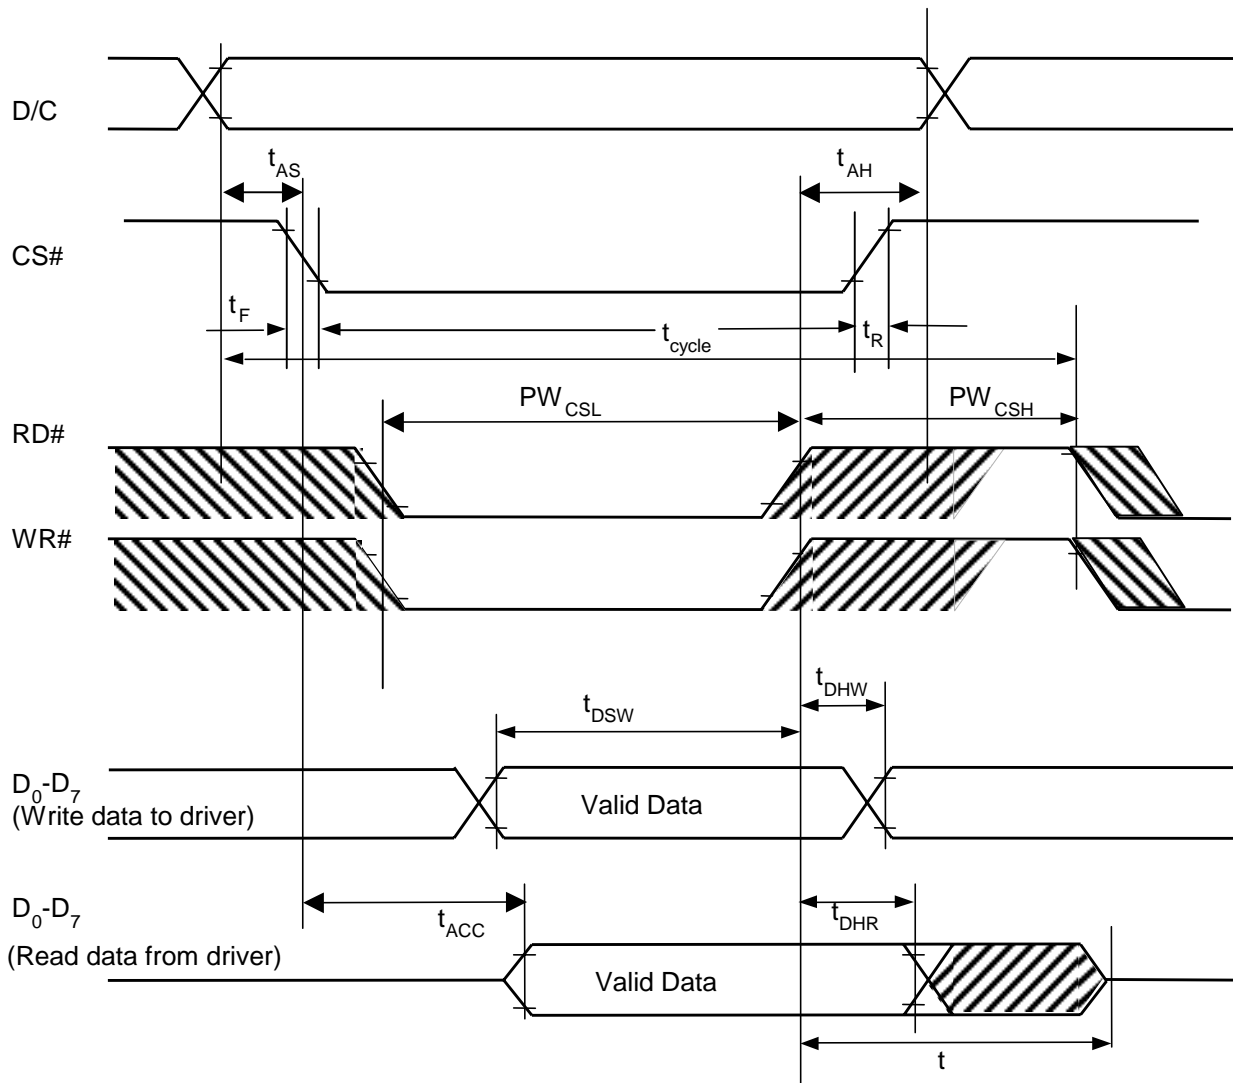


Figure 11 - 8080-series MPU parallel interface characteristics

Table 12 - Serial Interface Timing Characteristics

($V_{DD} - V_{SS} = 2.4$ to $3.5V$, $T_A = 25^\circ C$)

| Symbol | Parameter | Min | Typ | Max | Unit |
|-------------|------------------------|-----|-----|-----|------|
| t_{cycle} | Clock Cycle Time | 250 | - | - | ns |
| t_{AS} | Address Setup Time | 150 | - | - | ns |
| t_{AH} | Address Hold Time | 150 | - | - | ns |
| t_{CSS} | Chip Select Setup Time | 120 | - | - | ns |
| t_{CSH} | Chip Select Hold Time | 60 | - | - | ns |
| t_{DSW} | Write Data Setup Time | 100 | - | - | ns |
| t_{DHW} | Write Data Hold Time | 100 | - | - | ns |
| t_{CLKL} | Clock Low Time | 100 | - | - | ns |
| t_{CLKH} | Clock High Time | 100 | - | - | ns |
| t_R | Rise Time | - | - | 15 | ns |
| t_F | Fall Time | - | - | 15 | ns |


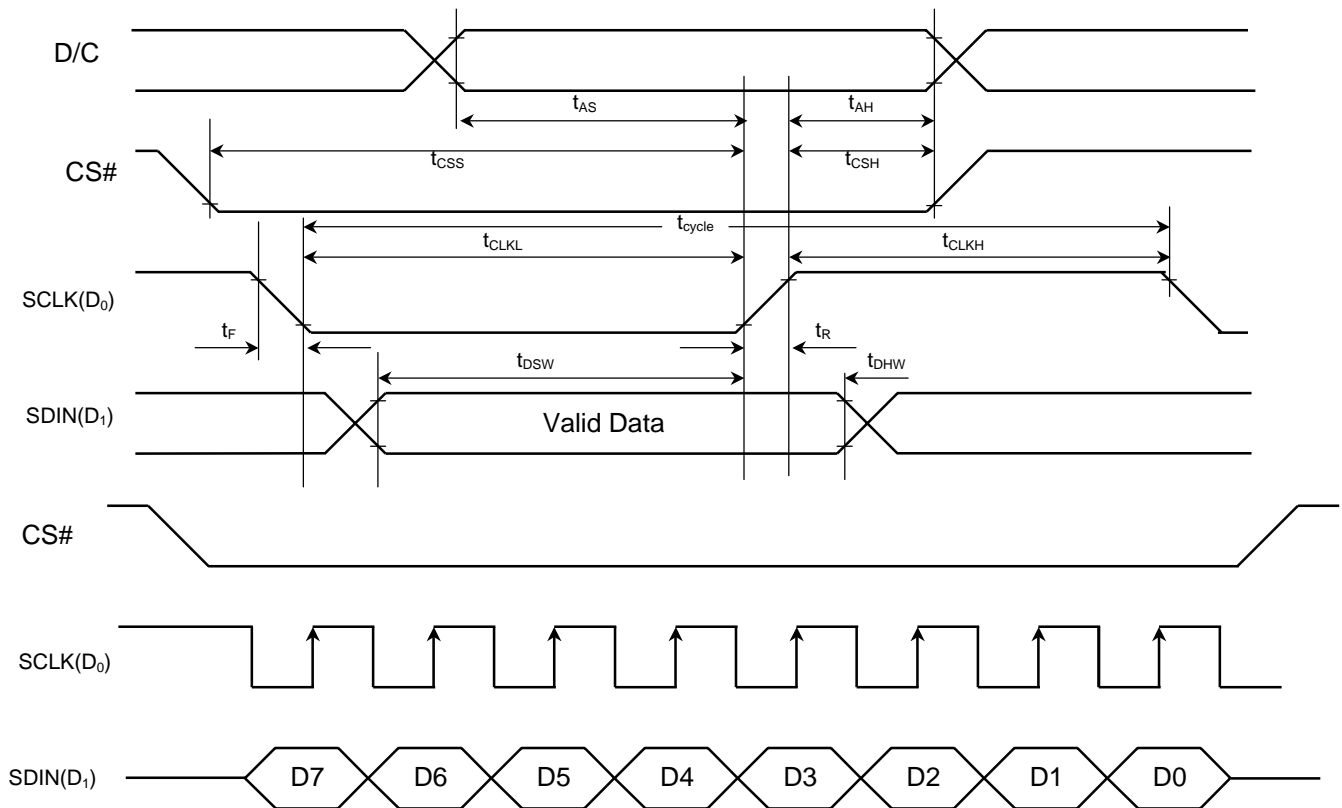


Figure 12 - Serial interface characteristics

13 APPLICATION EXAMPLE

Figure 13 - Application Example (Block Diagram of SSD1303T3)

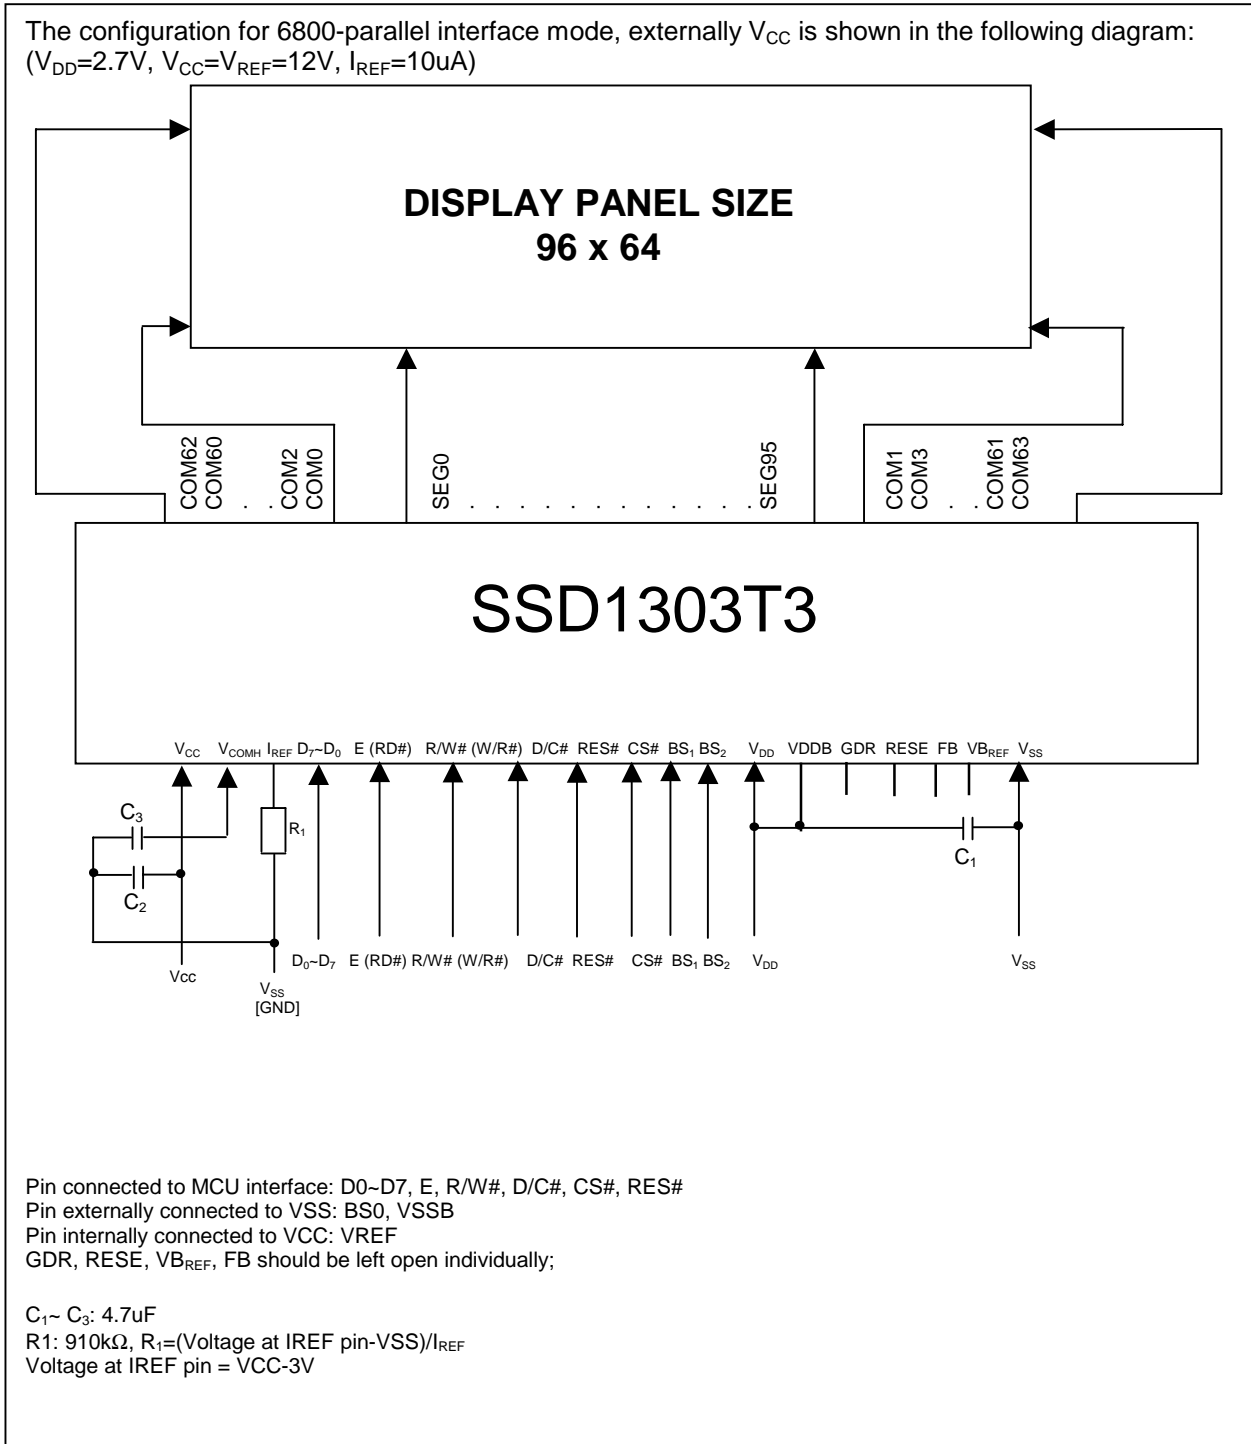

14 SSD1303T3R1 PACKAGE DETAILS

SSD1303T3R1 Pin Assignment

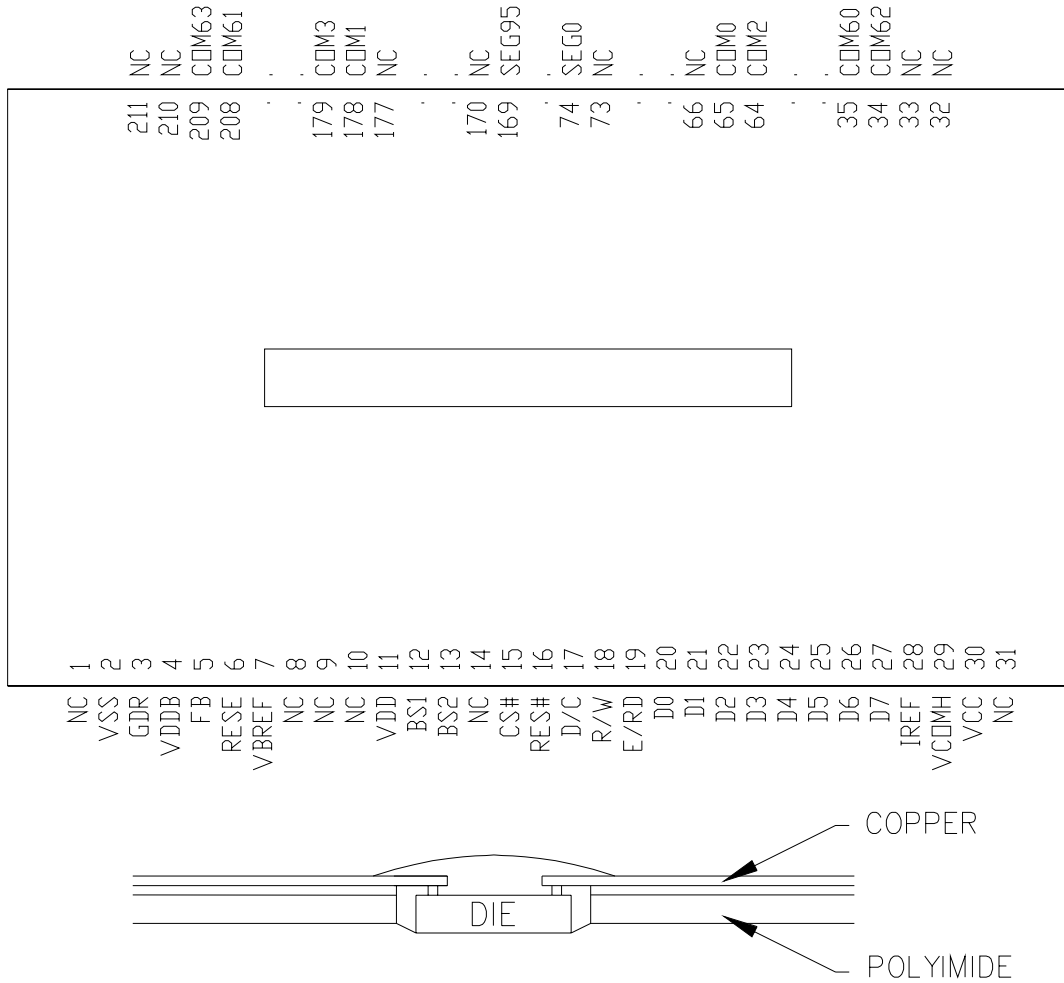


Figure 14 - SSD1303T3R1 pin assignment (Copper view, Normal TAB design)

Remark:



- Use internal clock
- VREF is connected to VCC
- Support MCU interface: 8-bit 6800/8080 parallel interface and SPI
- VSSB, BGGND are connected to VSS
- BS0 is connected to VSS

Table 13 - SSD1303T3R1 pin assignment

| Pin no. | Pin name | Pin no. | Pin name | Pin no. | Pin name | Pin no. | Pin name |
|---------|----------|---------|----------|---------|----------|---------|----------|
| 1 | NC | 61 | COM8 | 121 | SEG47 | 181 | COM7 |
| 2 | VSS | 62 | COM6 | 122 | SEG48 | 182 | COM9 |
| 3 | GDR | 63 | COM4 | 123 | SEG49 | 183 | COM11 |
| 4 | VDDDB | 64 | COM2 | 124 | SEG50 | 184 | COM13 |
| 5 | FB | 65 | COM0 | 125 | SEG51 | 185 | COM15 |
| 6 | RESE | 66 | NC | 126 | SEG52 | 186 | COM17 |
| 7 | VBREF | 67 | NC | 127 | SEG53 | 187 | COM19 |
| 8 | GP0 | 68 | NC | 128 | SEG54 | 188 | COM21 |
| 9 | GP1 | 69 | NC | 129 | SEG55 | 189 | COM23 |
| 10 | NC | 70 | NC | 130 | SEG56 | 190 | COM25 |
| 11 | VDD1 | 71 | NC | 131 | SEG57 | 191 | COM27 |
| 12 | BS1 | 72 | NC | 132 | SEG58 | 192 | COM29 |
| 13 | BS2 | 73 | NC | 133 | SEG59 | 193 | COM31 |
| 14 | NC | 74 | SEG0 | 134 | SEG60 | 194 | COM33 |
| 15 | CS# | 75 | SEG1 | 135 | SEG61 | 195 | COM35 |
| 16 | RES# | 76 | SEG2 | 136 | SEG62 | 196 | COM37 |
| 17 | D/C | 77 | SEG3 | 137 | SEG63 | 197 | COM39 |
| 18 | R/W | 78 | SEG4 | 138 | SEG64 | 198 | COM41 |
| 19 | E/RD | 79 | SEG5 | 139 | SEG65 | 199 | COM43 |
| 20 | D0 | 80 | SEG6 | 140 | SEG66 | 200 | COM45 |
| 21 | D1 | 81 | SEG7 | 141 | SEG67 | 201 | COM47 |
| 22 | D2 | 82 | SEG8 | 142 | SEG68 | 202 | COM49 |
| 23 | D3 | 83 | SEG9 | 143 | SEG69 | 203 | COM51 |
| 24 | D4 | 84 | SEG10 | 144 | SEG70 | 204 | COM53 |
| 25 | D5 | 85 | SEG11 | 145 | SEG71 | 205 | COM55 |
| 26 | D6 | 86 | SEG12 | 146 | SEG72 | 206 | COM57 |
| 27 | D7 | 87 | SEG13 | 147 | SEG73 | 207 | COM59 |
| 28 | IREF | 88 | SEG14 | 148 | SEG74 | 208 | COM61 |
| 29 | VCOMH | 89 | SEG15 | 149 | SEG75 | 209 | COM63 |
| 30 | VCC | 90 | SEG16 | 150 | SEG76 | 210 | NC |
| 31 | NC | 91 | SEG17 | 151 | SEG77 | 211 | NC |
| 32 | NC | 92 | SEG18 | 152 | SEG78 | | |
| 33 | NC | 93 | SEG19 | 153 | SEG79 | | |
| 34 | COM62 | 94 | SEG20 | 154 | SEG80 | | |
| 35 | COM60 | 95 | SEG21 | 155 | SEG81 | | |
| 36 | COM58 | 96 | SEG22 | 156 | SEG82 | | |
| 37 | COM56 | 97 | SEG23 | 157 | SEG83 | | |
| 38 | COM54 | 98 | SEG24 | 158 | SEG84 | | |
| 39 | COM52 | 99 | SEG25 | 159 | SEG85 | | |
| 40 | COM50 | 100 | SEG26 | 160 | SEG86 | | |
| 41 | COM48 | 101 | SEG27 | 161 | SEG87 | | |
| 42 | COM46 | 102 | SEG28 | 162 | SEG88 | | |
| 43 | COM44 | 103 | SEG29 | 163 | SEG89 | | |
| 44 | COM42 | 104 | SEG30 | 164 | SEG90 | | |
| 45 | COM40 | 105 | SEG31 | 165 | SEG91 | | |
| 46 | COM38 | 106 | SEG32 | 166 | SEG92 | | |
| 47 | COM36 | 107 | SEG33 | 167 | SEG93 | | |
| 48 | COM34 | 108 | SEG34 | 168 | SEG94 | | |
| 49 | COM32 | 109 | SEG35 | 169 | SEG95 | | |
| 50 | COM30 | 110 | SEG36 | 170 | NC | | |
| 51 | COM28 | 111 | SEG37 | 171 | NC | | |
| 52 | COM26 | 112 | SEG38 | 172 | NC | | |
| 53 | COM24 | 113 | SEG39 | 173 | NC | | |
| 54 | COM22 | 114 | SEG40 | 174 | NC | | |
| 55 | COM20 | 115 | SEG41 | 175 | NC | | |
| 56 | COM18 | 116 | SEG42 | 176 | NC | | |
| 57 | COM16 | 117 | SEG43 | 177 | NC | | |
| 58 | COM14 | 118 | SEG44 | 178 | COM1 | | |
| 59 | COM12 | 119 | SEG45 | 179 | COM3 | | |
| 60 | COM10 | 120 | SEG46 | 180 | COM5 | | |


SSD1303T3R1 TAB PACKAGE DIMENSIONS

TAPE
UN-WINDING
DIRECTION

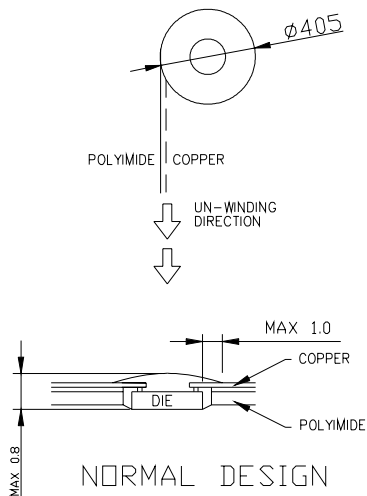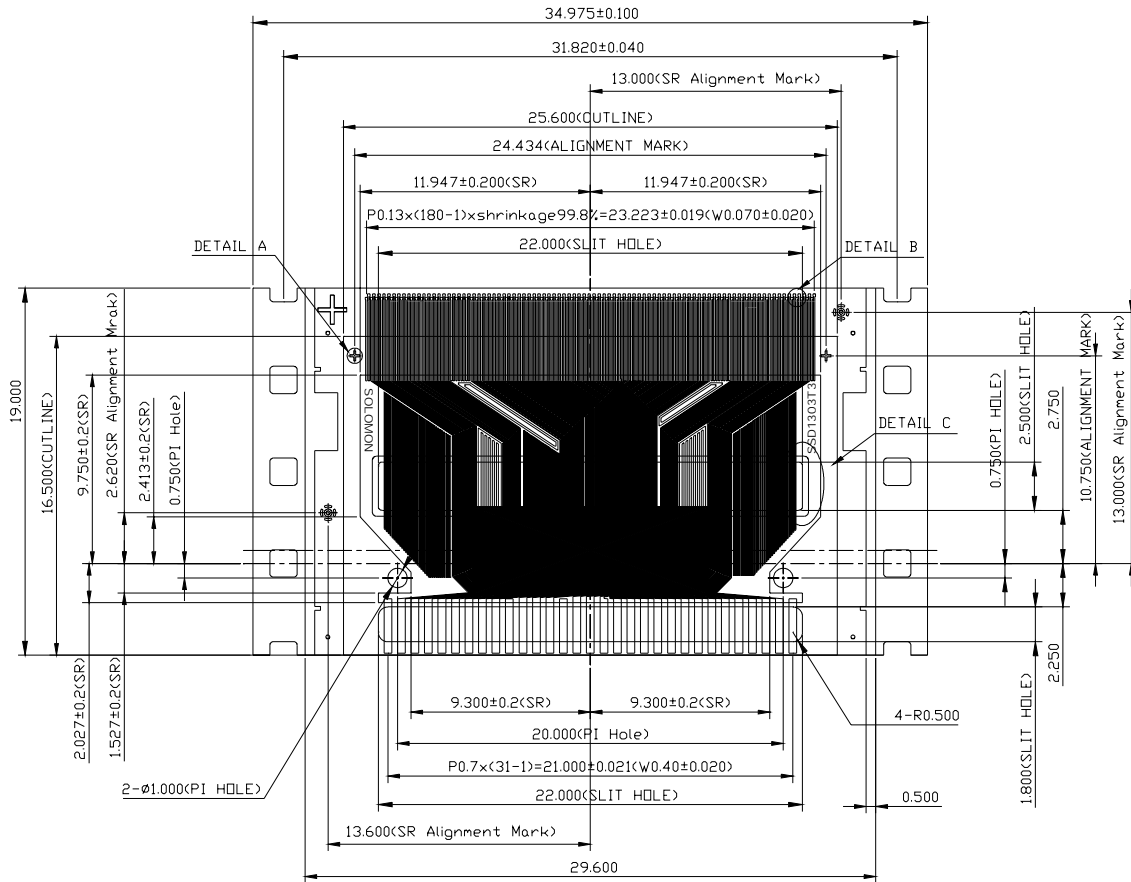



NOTE:


1. GENERAL TOLERANCE: ±0.05MM
2. MATERIAL
PI: 75±6µm
CU: 18µm
SR: 26±14µm
3. SN PLATING: 0.200±0.05µm
4. TAPESITE: 4 SPH, 19mm



DETAIL A
SCALE 2:1

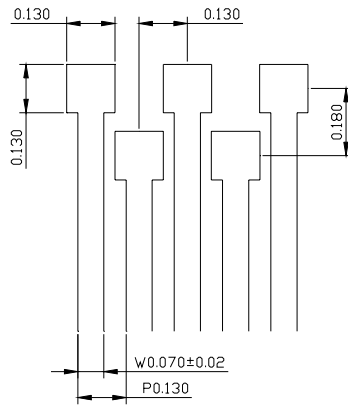

DETAIL B
SCALE 5:1

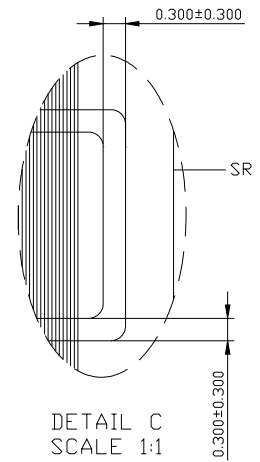


DETAIL C
SCALE 1:1

15 SSD1303T6R1 PACKAGE DETAILS

SSD1303T6R1 Pin Assignment

Figure 15 - SSD1303T6R1 pin assignment (Copper view)

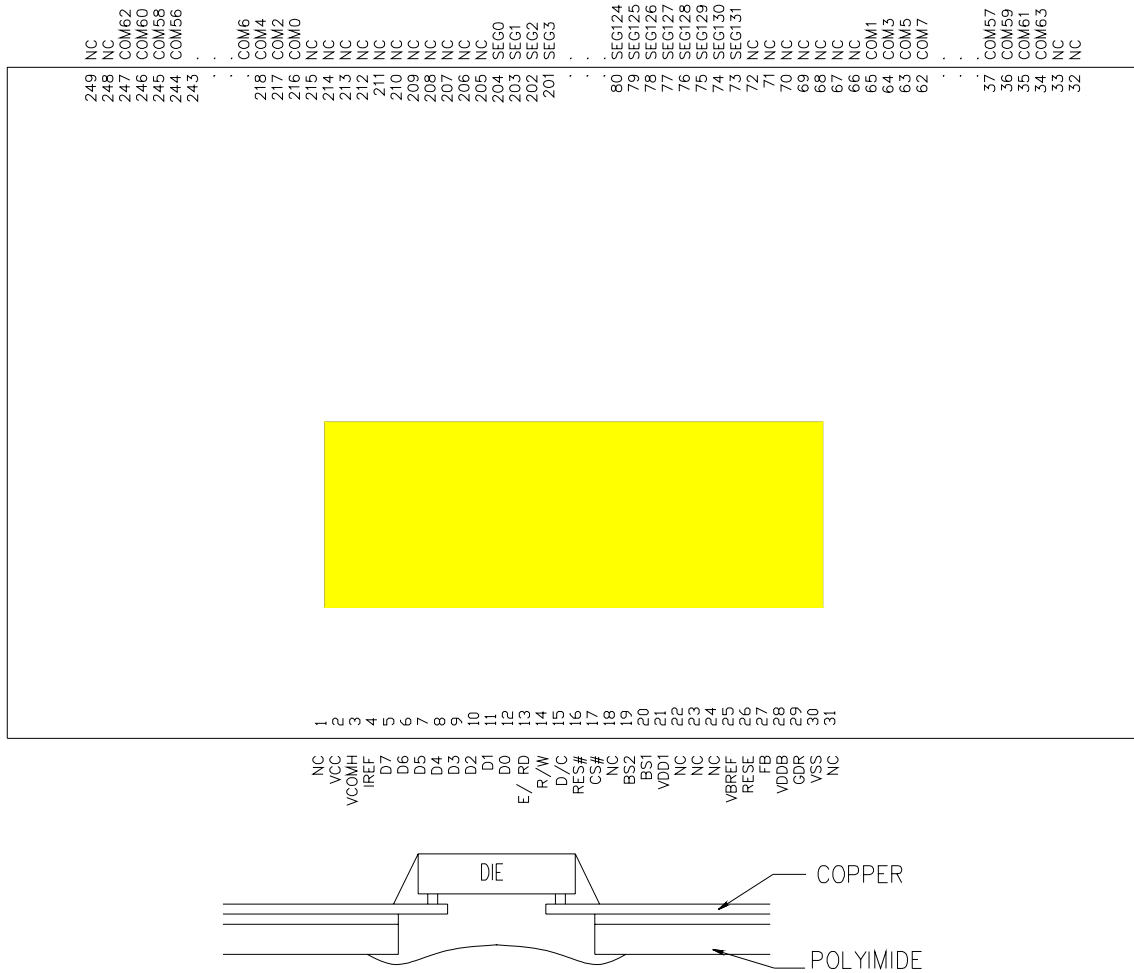


Remark:

- Use internal clock
- VREF is connected to VCC
- Support MCU interface: 8-bit 6800/8080 parallel interface and SPI
- VSSB, BGGND are connected to VSS
- BS0 is connected to VSS

Table 14 - SSD1303T6R1 pin assignment


| Pin no. | Pin name | Pin no. | Pin name | Pin no. | Pin name | Pin no. | Pin name | Pin no. | Pin name |
|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| 1 | NC | 61 | COM9 | 121 | SEG83 | 181 | SEG23 | 241 | COM50 |
| 2 | VCC | 62 | COM7 | 122 | SEG82 | 182 | SEG22 | 242 | COM52 |
| 3 | VCOMH | 63 | COM5 | 123 | SEG81 | 183 | SEG21 | 243 | COM54 |
| 4 | IREF | 64 | COM3 | 124 | SEG80 | 184 | SEG20 | 244 | COM56 |
| 5 | D7 | 65 | COM1 | 125 | SEG79 | 185 | SEG19 | 245 | COM58 |
| 6 | D6 | 66 | NC | 126 | SEG78 | 186 | SEG18 | 246 | COM60 |
| 7 | D5 | 67 | NC | 127 | SEG77 | 187 | SEG17 | 247 | COM62 |
| 8 | D4 | 68 | NC | 128 | SEG76 | 188 | SEG16 | 248 | NC |
| 9 | D3 | 69 | NC | 129 | SEG75 | 189 | SEG15 | 249 | NC |
| 10 | D2 | 70 | NC | 130 | SEG74 | 190 | SEG14 | | |
| 11 | D1 | 71 | NC | 131 | SEG73 | 191 | SEG13 | | |
| 12 | D0 | 72 | NC | 132 | SEG72 | 192 | SEG12 | | |
| 13 | E/RD | 73 | SEG131 | 133 | SEG71 | 193 | SEG11 | | |
| 14 | R/W | 74 | SEG130 | 134 | SEG70 | 194 | SEG10 | | |
| 15 | D/C | 75 | SEG129 | 135 | SEG69 | 195 | SEG9 | | |
| 16 | RES# | 76 | SEG128 | 136 | SEG68 | 196 | SEG8 | | |
| 17 | CS# | 77 | SEG127 | 137 | SEG67 | 197 | SEG7 | | |
| 18 | NC | 78 | SEG126 | 138 | SEG66 | 198 | SEG6 | | |
| 19 | BS2 | 79 | SEG125 | 139 | SEG65 | 199 | SEG5 | | |
| 20 | BS1 | 80 | SEG124 | 140 | SEG64 | 200 | SEG4 | | |
| 21 | VDD | 81 | SEG123 | 141 | SEG63 | 201 | SEG3 | | |
| 22 | NC | 82 | SEG122 | 142 | SEG62 | 202 | SEG2 | | |
| 23 | NC | 83 | SEG121 | 143 | SEG61 | 203 | SEG1 | | |
| 24 | NC | 84 | SEG120 | 144 | SEG60 | 204 | SEG0 | | |
| 25 | VBREF | 85 | SEG119 | 145 | SEG59 | 205 | NC | | |
| 26 | RESE | 86 | SEG118 | 146 | SEG58 | 206 | NC | | |
| 27 | FB | 87 | SEG117 | 147 | SEG57 | 207 | NC | | |
| 28 | VDDDB | 88 | SEG116 | 148 | SEG56 | 208 | NC | | |
| 29 | GDR | 89 | SEG115 | 149 | SEG55 | 209 | NC | | |
| 30 | VSS | 90 | SEG114 | 150 | SEG54 | 210 | NC | | |
| 31 | NC | 91 | SEG113 | 151 | SEG53 | 211 | NC | | |
| 32 | NC | 92 | SEG112 | 152 | SEG52 | 212 | NC | | |
| 33 | NC | 93 | SEG111 | 153 | SEG51 | 213 | NC | | |
| 34 | COM63 | 94 | SEG110 | 154 | SEG50 | 214 | NC | | |
| 35 | COM61 | 95 | SEG109 | 155 | SEG49 | 215 | NC | | |
| 36 | COM59 | 96 | SEG108 | 156 | SEG48 | 216 | COM0 | | |
| 37 | COM57 | 97 | SEG107 | 157 | SEG47 | 217 | COM2 | | |
| 38 | COM55 | 98 | SEG106 | 158 | SEG46 | 218 | COM4 | | |
| 39 | COM53 | 99 | SEG105 | 159 | SEG45 | 219 | COM6 | | |
| 40 | COM51 | 100 | SEG104 | 160 | SEG44 | 220 | COM8 | | |
| 41 | COM49 | 101 | SEG103 | 161 | SEG43 | 221 | COM10 | | |
| 42 | COM47 | 102 | SEG102 | 162 | SEG42 | 222 | COM12 | | |
| 43 | COM45 | 103 | SEG101 | 163 | SEG41 | 223 | COM14 | | |
| 44 | COM43 | 104 | SEG100 | 164 | SEG40 | 224 | COM16 | | |
| 45 | COM41 | 105 | SEG99 | 165 | SEG39 | 225 | COM18 | | |
| 46 | COM39 | 106 | SEG98 | 166 | SEG38 | 226 | COM20 | | |
| 47 | COM37 | 107 | SEG97 | 167 | SEG37 | 227 | COM22 | | |
| 48 | COM35 | 108 | SEG96 | 168 | SEG36 | 228 | COM24 | | |
| 49 | COM33 | 109 | SEG95 | 169 | SEG35 | 229 | COM26 | | |
| 50 | COM31 | 110 | SEG94 | 170 | SEG34 | 230 | COM28 | | |
| 51 | COM29 | 111 | SEG93 | 171 | SEG33 | 231 | COM30 | | |
| 52 | COM27 | 112 | SEG92 | 172 | SEG32 | 232 | COM32 | | |
| 53 | COM25 | 113 | SEG91 | 173 | SEG31 | 233 | COM34 | | |
| 54 | COM23 | 114 | SEG90 | 174 | SEG30 | 234 | COM36 | | |
| 55 | COM21 | 115 | SEG89 | 175 | SEG29 | 235 | COM38 | | |
| 56 | COM19 | 116 | SEG88 | 176 | SEG28 | 236 | COM40 | | |
| 57 | COM17 | 117 | SEG87 | 177 | SEG27 | 237 | COM42 | | |
| 58 | COM15 | 118 | SEG86 | 178 | SEG26 | 238 | COM44 | | |
| 59 | COM13 | 119 | SEG85 | 179 | SEG25 | 239 | COM46 | | |
| 60 | COM11 | 120 | SEG84 | 180 | SEG24 | 240 | COM48 | | |

SSD1303T6R1 TAB Package Dimensions


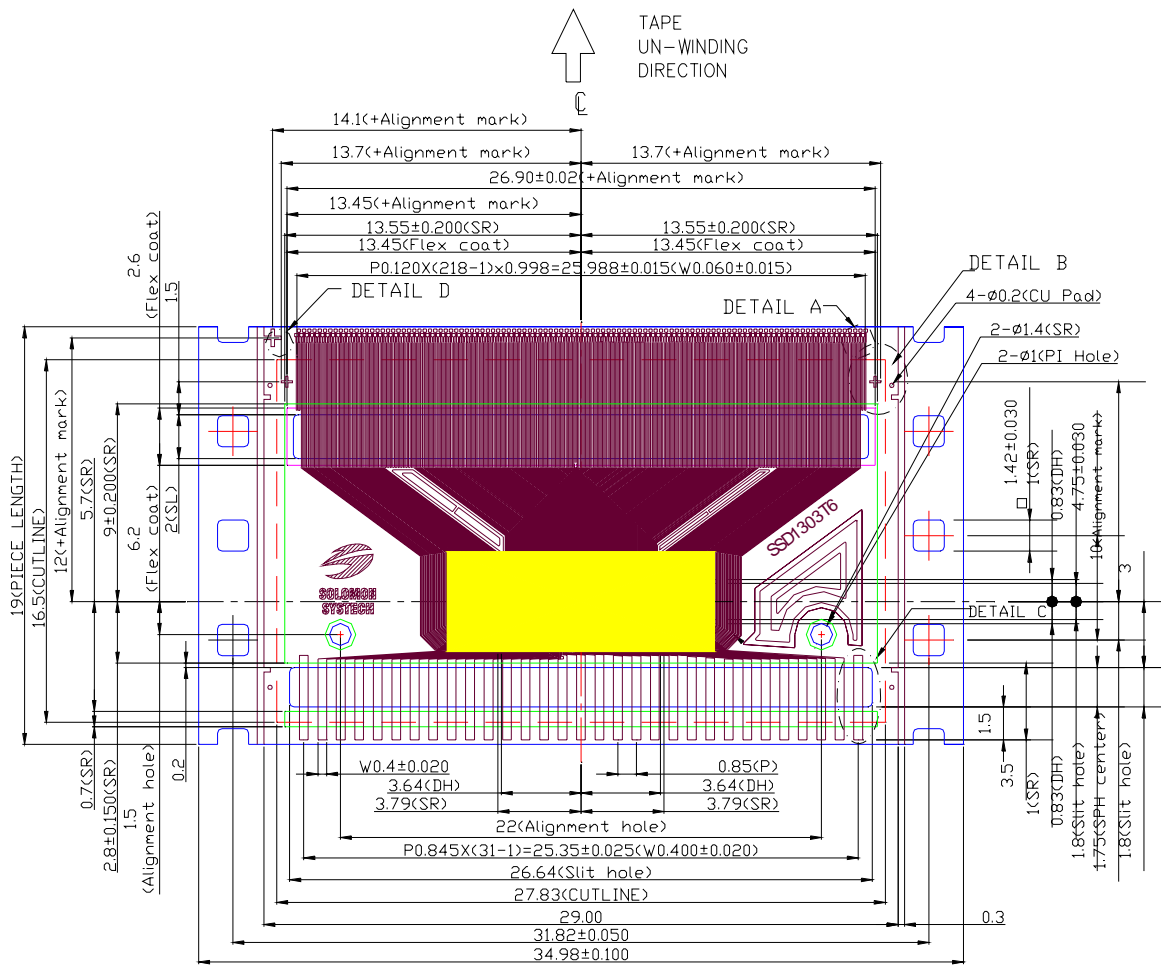


NOTE:


1. GENERAL TOLERANCE: $\pm 0.05\text{MM}$
2. MATERIAL
 PI: UPILEX-S 75 $\pm 6\mu\text{m}$
 ADHESIVE: 12 $\pm 2\mu\text{m}$
 CU: 18 μm
 SR: 26 $\pm 14\mu\text{m}$
 TOLERANCE ± 0.200
3. SN PLATING: 0.200 $\pm 0.05\mu\text{m}$
4. TAPESITE: 4 SPH, 19mm




MIRROR DESIGN

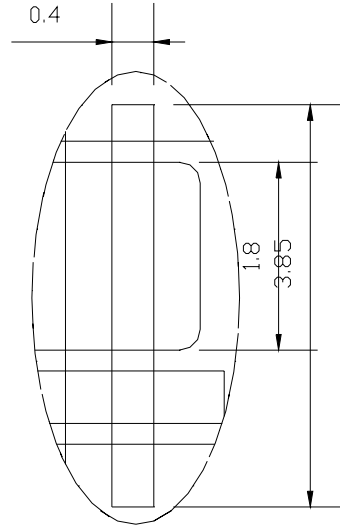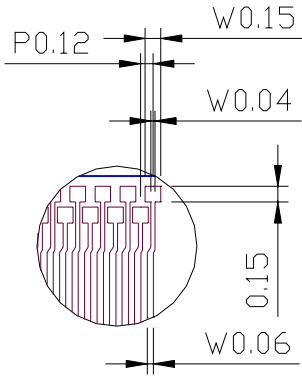

DETAIL C

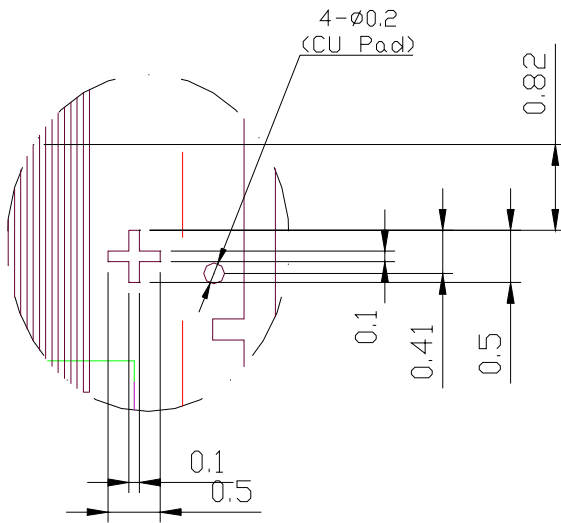


DETAIL B



DETAIL D

| | | | | | |
|----|-------|-----|-------|-----|-------|
| 1 | NC | 170 | NC | 211 | NC |
| 2 | VSS | 169 | SEG95 | 210 | NC |
| 3 | GDR | 179 | CDM3 | 209 | CDM63 |
| 4 | VDDDB | 178 | CDM1 | 208 | CDM61 |
| 5 | FB | 177 | NC | | |
| 6 | RESE | | | | |
| 7 | VBREF | | | | |
| 8 | NC | | | | |
| 9 | NC | | | | |
| 10 | NC | | | | |
| 11 | VDD | | | | |
| 12 | BS1 | | | | |
| 13 | BS2 | | | | |
| 14 | NC | | | | |
| 15 | CS# | | | | |
| 16 | RES# | | | | |
| 17 | D/C | 74 | SEG0 | | |
| 18 | R/W | 73 | NC | | |
| 19 | E/RD | | | | |
| 20 | D0 | | | | |
| 21 | D1 | 66 | NC | | |
| 22 | D2 | 65 | CDM0 | | |
| 23 | D3 | 64 | CDM2 | | |
| 24 | D4 | | | | |
| 25 | D5 | | | | |
| 26 | D6 | | | | |
| 27 | D7 | 35 | CDM60 | | |
| 28 | IREF | 34 | CDM62 | | |
| 29 | VCDMH | 33 | NC | | |
| 30 | VCC | 32 | NC | | |
| 31 | NC | | | | |

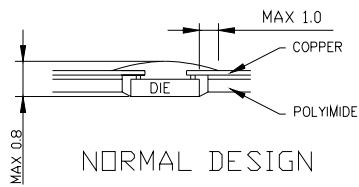


Remark:

- Use internal clock
- VREF is connected to VCC
- Support MCU interface: 8-bit 6800/8080 parallel interface and SPI
- VSSB, BGGND are connected to VSS
- BS0 is connected to VSS


Table 15 - SSD1303T8R1 pin assignment


| Pin no. | Pin name | Pin no. | Pin name | Pin no. | Pin name | Pin no. | Pin name |
|---------|----------|---------|----------|---------|----------|---------|----------|
| 1 | NC | 61 | COM8 | 121 | SEG47 | 181 | COM7 |
| 2 | VSS | 62 | COM6 | 122 | SEG48 | 182 | COM9 |
| 3 | GDR | 63 | COM4 | 123 | SEG49 | 183 | COM11 |
| 4 | VDDB | 64 | COM2 | 124 | SEG50 | 184 | COM13 |
| 5 | FB | 65 | COM0 | 125 | SEG51 | 185 | COM15 |
| 6 | RESE | 66 | NC | 126 | SEG52 | 186 | COM17 |
| 7 | VBREF | 67 | NC | 127 | SEG53 | 187 | COM19 |
| 8 | GP0 | 68 | NC | 128 | SEG54 | 188 | COM21 |
| 9 | GP1 | 69 | NC | 129 | SEG55 | 189 | COM23 |
| 10 | NC | 70 | NC | 130 | SEG56 | 190 | COM25 |
| 11 | VDD1 | 71 | NC | 131 | SEG57 | 191 | COM27 |
| 12 | BS1 | 72 | NC | 132 | SEG58 | 192 | COM29 |
| 13 | BS2 | 73 | NC | 133 | SEG59 | 193 | COM31 |
| 14 | NC | 74 | SEG0 | 134 | SEG60 | 194 | COM33 |
| 15 | CS# | 75 | SEG1 | 135 | SEG61 | 195 | COM35 |
| 16 | RES# | 76 | SEG2 | 136 | SEG62 | 196 | COM37 |
| 17 | D/C | 77 | SEG3 | 137 | SEG63 | 197 | COM39 |
| 18 | R/W | 78 | SEG4 | 138 | SEG64 | 198 | COM41 |
| 19 | E/RD | 79 | SEG5 | 139 | SEG65 | 199 | COM43 |
| 20 | D0 | 80 | SEG6 | 140 | SEG66 | 200 | COM45 |
| 21 | D1 | 81 | SEG7 | 141 | SEG67 | 201 | COM47 |
| 22 | D2 | 82 | SEG8 | 142 | SEG68 | 202 | COM49 |
| 23 | D3 | 83 | SEG9 | 143 | SEG69 | 203 | COM51 |
| 24 | D4 | 84 | SEG10 | 144 | SEG70 | 204 | COM53 |
| 25 | D5 | 85 | SEG11 | 145 | SEG71 | 205 | COM55 |
| 26 | D6 | 86 | SEG12 | 146 | SEG72 | 206 | COM57 |
| 27 | D7 | 87 | SEG13 | 147 | SEG73 | 207 | COM59 |
| 28 | IREF | 88 | SEG14 | 148 | SEG74 | 208 | COM61 |
| 29 | VCOMH | 89 | SEG15 | 149 | SEG75 | 209 | COM63 |
| 30 | VCC | 90 | SEG16 | 150 | SEG76 | 210 | NC |
| 31 | NC | 91 | SEG17 | 151 | SEG77 | 211 | NC |
| 32 | NC | 92 | SEG18 | 152 | SEG78 | | |
| 33 | NC | 93 | SEG19 | 153 | SEG79 | | |
| 34 | COM62 | 94 | SEG20 | 154 | SEG80 | | |
| 35 | COM60 | 95 | SEG21 | 155 | SEG81 | | |
| 36 | COM58 | 96 | SEG22 | 156 | SEG82 | | |
| 37 | COM56 | 97 | SEG23 | 157 | SEG83 | | |
| 38 | COM54 | 98 | SEG24 | 158 | SEG84 | | |
| 39 | COM52 | 99 | SEG25 | 159 | SEG85 | | |
| 40 | COM50 | 100 | SEG26 | 160 | SEG86 | | |
| 41 | COM48 | 101 | SEG27 | 161 | SEG87 | | |
| 42 | COM46 | 102 | SEG28 | 162 | SEG88 | | |
| 43 | COM44 | 103 | SEG29 | 163 | SEG89 | | |
| 44 | COM42 | 104 | SEG30 | 164 | SEG90 | | |
| 45 | COM40 | 105 | SEG31 | 165 | SEG91 | | |
| 46 | COM38 | 106 | SEG32 | 166 | SEG92 | | |
| 47 | COM36 | 107 | SEG33 | 167 | SEG93 | | |
| 48 | COM34 | 108 | SEG34 | 168 | SEG94 | | |
| 49 | COM32 | 109 | SEG35 | 169 | SEG95 | | |
| 50 | COM30 | 110 | SEG36 | 170 | NC | | |
| 51 | COM28 | 111 | SEG37 | 171 | NC | | |
| 52 | COM26 | 112 | SEG38 | 172 | NC | | |
| 53 | COM24 | 113 | SEG39 | 173 | NC | | |
| 54 | COM22 | 114 | SEG40 | 174 | NC | | |
| 55 | COM20 | 115 | SEG41 | 175 | NC | | |
| 56 | COM18 | 116 | SEG42 | 176 | NC | | |
| 57 | COM16 | 117 | SEG43 | 177 | NC | | |
| 58 | COM14 | 118 | SEG44 | 178 | COM1 | | |
| 59 | COM12 | 119 | SEG45 | 179 | COM3 | | |
| 60 | COM10 | 120 | SEG46 | 180 | COM5 | | |

SSD1303T8R1 TAB Package Dimensions

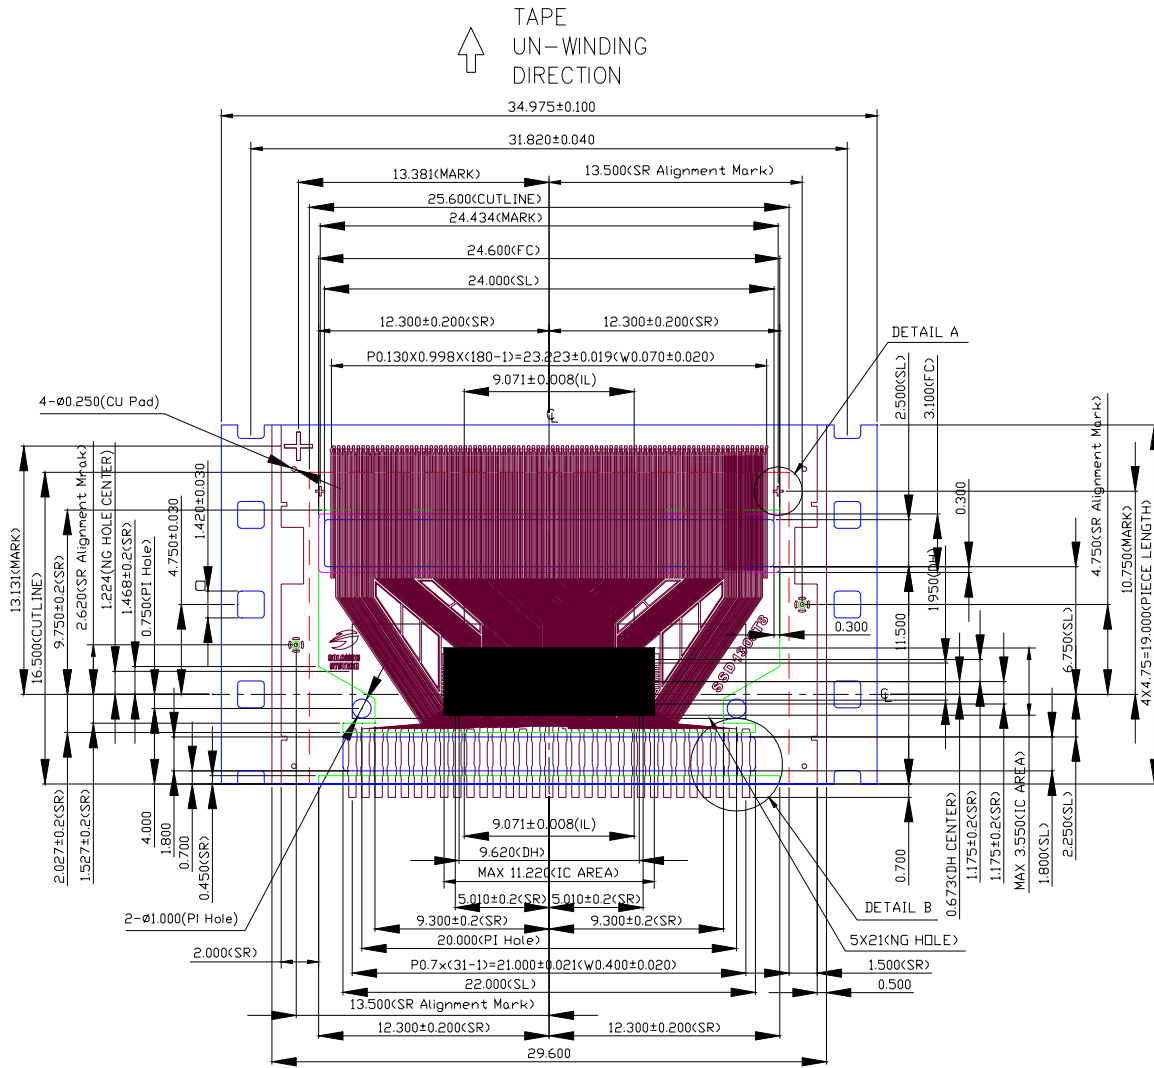


- NOTE:
- GENERAL TOLERANCE: ±0.05MM
 - MATERIAL
 PI: 75±6um
 ADHESIVE: 12±2um
 CU: 18±5um
 SR: 26±14um
 TOLERANCE±0.200
 FLEX COATING: Min10um
 - SN PLATING: 0.200±0.05um
 - TAPESITE: 4 SPH,19mm



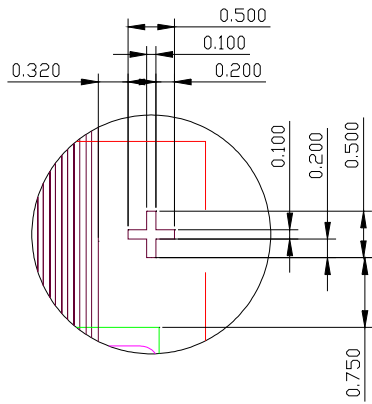

DETAIL A

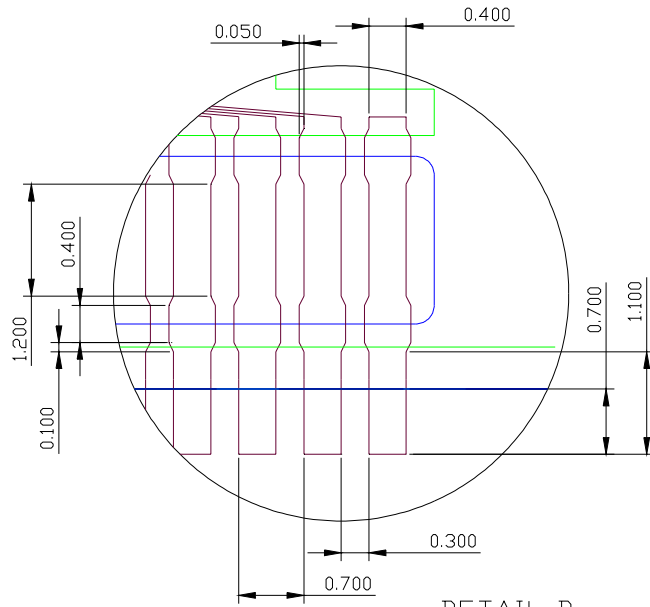


DETAIL B

17 SSD1303T9R1 PACKAGE DETAILS

SSD1303T9R1 Pin Assignment

Figure 16 - SSD1303T9R1 pin assignment (Copper view)

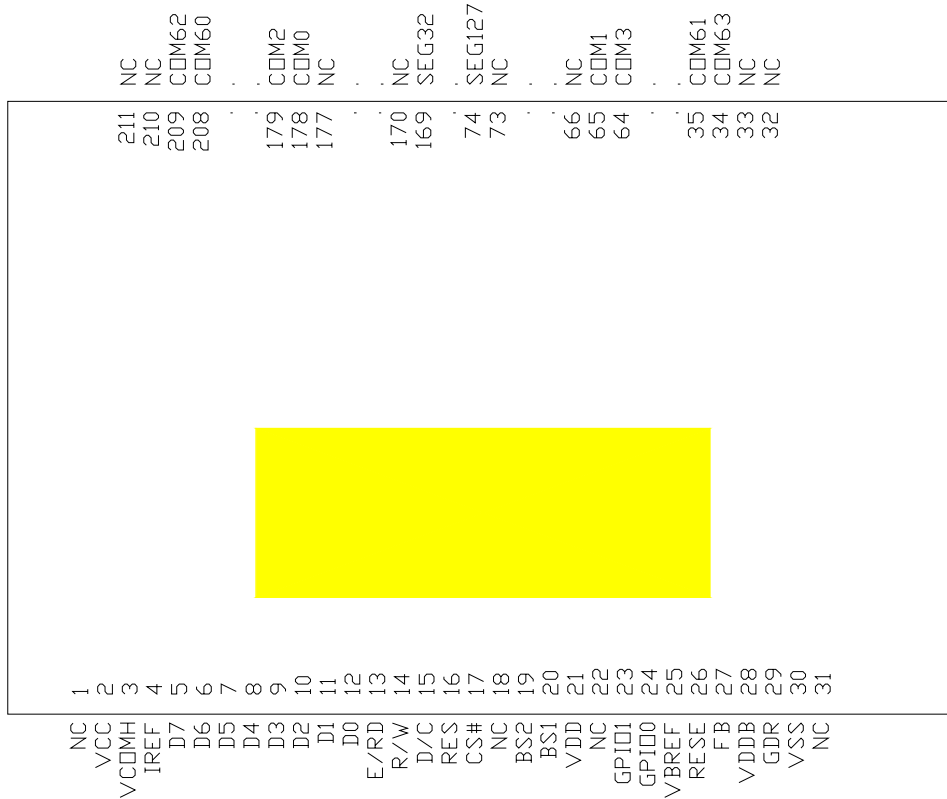

Remark:

- Use internal clock
- VREF is connected to VCC
- Support MCU interface: 8-bit 6800/8080 parallel interface and SPI
- VSSB, BGGND are connected to VSS
- BS0 is connected to VSS


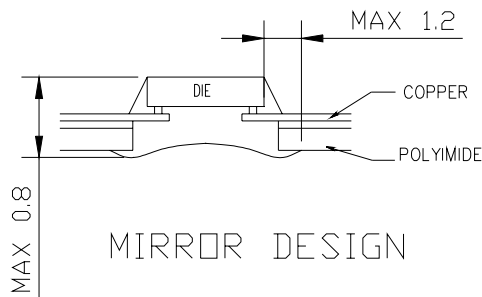



Table 16 - SSD1303T9R1 pin assignment

| Pin No. | Pin name | Pin No. | Pin name | Pin No. | Pin name | Pin No. | Pin name |
|---------|----------|---------|----------|---------|----------|---------|----------|
| 1 | NC | 61 | COM9 | 121 | SEG80 | 181 | COM6 |
| 2 | VCC | 62 | COM7 | 122 | SEG79 | 182 | COM8 |
| 3 | VCOMH | 63 | COM5 | 123 | SEG78 | 183 | COM10 |
| 4 | IREF | 64 | COM3 | 124 | SEG77 | 184 | COM12 |
| 5 | D7 | 65 | COM1 | 125 | SEG76 | 185 | COM14 |
| 6 | D6 | 66 | NC | 126 | SEG75 | 186 | COM16 |
| 7 | D5 | 67 | NC | 127 | SEG74 | 187 | COM18 |
| 8 | D4 | 68 | NC | 128 | SEG73 | 188 | COM20 |
| 9 | D3 | 69 | NC | 129 | SEG72 | 189 | COM22 |
| 10 | D2 | 70 | NC | 130 | SEG71 | 190 | COM24 |
| 11 | D1 | 71 | NC | 131 | SEG70 | 191 | COM26 |
| 12 | D0 | 72 | NC | 132 | SEG69 | 192 | COM28 |
| 13 | E | 73 | NC | 133 | SEG68 | 193 | COM30 |
| 14 | R/W | 74 | SEG127 | 134 | SEG67 | 194 | COM32 |
| 15 | D/C | 75 | SEG126 | 135 | SEG66 | 195 | COM34 |
| 16 | RES | 76 | SEG125 | 136 | SEG65 | 196 | COM36 |
| 17 | CS# | 77 | SEG124 | 137 | SEG64 | 197 | COM38 |
| 18 | NC | 78 | SEG123 | 138 | SEG63 | 198 | COM40 |
| 19 | BS2 | 79 | SEG122 | 139 | SEG62 | 199 | COM42 |
| 20 | BS1 | 80 | SEG121 | 140 | SEG61 | 200 | COM44 |
| 21 | VDD1 | 81 | SEG120 | 141 | SEG60 | 201 | COM46 |
| 22 | NC | 82 | SEG119 | 142 | SEG59 | 202 | COM48 |
| 23 | GPIO1 | 83 | SEG118 | 143 | SEG58 | 203 | COM50 |
| 24 | GPIO0 | 84 | SEG117 | 144 | SEG57 | 204 | COM52 |
| 25 | VBREF | 85 | SEG116 | 145 | SEG56 | 205 | COM54 |
| 26 | RESE | 86 | SEG115 | 146 | SEG55 | 206 | COM56 |
| 27 | FB | 87 | SEG114 | 147 | SEG54 | 207 | COM58 |
| 28 | VDDB | 88 | SEG113 | 148 | SEG53 | 208 | COM60 |
| 29 | GDR | 89 | SEG112 | 149 | SEG52 | 209 | COM62 |
| 30 | VSS | 90 | SEG111 | 150 | SEG51 | 210 | NC |
| 31 | NC | 91 | SEG110 | 151 | SEG50 | 211 | NC |
| 32 | NC | 92 | SEG109 | 152 | SEG49 | | |
| 33 | NC | 93 | SEG108 | 153 | SEG48 | | |
| 34 | COM63 | 94 | SEG107 | 154 | SEG47 | | |
| 35 | COM61 | 95 | SEG106 | 155 | SEG46 | | |
| 36 | COM59 | 96 | SEG105 | 156 | SEG45 | | |
| 37 | COM57 | 97 | SEG104 | 157 | SEG44 | | |
| 38 | COM55 | 98 | SEG103 | 158 | SEG43 | | |
| 39 | COM53 | 99 | SEG102 | 159 | SEG42 | | |
| 40 | COM51 | 100 | SEG101 | 160 | SEG41 | | |
| 41 | COM49 | 101 | SEG100 | 161 | SEG40 | | |
| 42 | COM47 | 102 | SEG99 | 162 | SEG39 | | |
| 43 | COM45 | 103 | SEG98 | 163 | SEG38 | | |
| 44 | COM43 | 104 | SEG97 | 164 | SEG37 | | |
| 45 | COM41 | 105 | SEG96 | 165 | SEG36 | | |
| 46 | COM39 | 106 | SEG95 | 166 | SEG35 | | |
| 47 | COM37 | 107 | SEG94 | 167 | SEG34 | | |
| 48 | COM35 | 108 | SEG93 | 168 | SEG33 | | |
| 49 | COM33 | 109 | SEG92 | 169 | SEG32 | | |
| 50 | COM31 | 110 | SEG91 | 170 | NC | | |
| 51 | COM29 | 111 | SEG90 | 171 | NC | | |
| 52 | COM27 | 112 | SEG89 | 172 | NC | | |
| 53 | COM25 | 113 | SEG88 | 173 | NC | | |
| 54 | COM23 | 114 | SEG87 | 174 | NC | | |
| 55 | COM21 | 115 | SEG86 | 175 | NC | | |
| 56 | COM19 | 116 | SEG85 | 176 | NC | | |
| 57 | COM17 | 117 | SEG84 | 177 | NC | | |
| 58 | COM15 | 118 | SEG83 | 178 | COM0 | | |
| 59 | COM13 | 119 | SEG82 | 179 | COM2 | | |
| 60 | COM11 | 120 | SEG81 | 180 | COM4 | | |

SSD1303T9R1 TAB Package Dimensions



 TAPE
 UN-WINDING
 DIRECTION

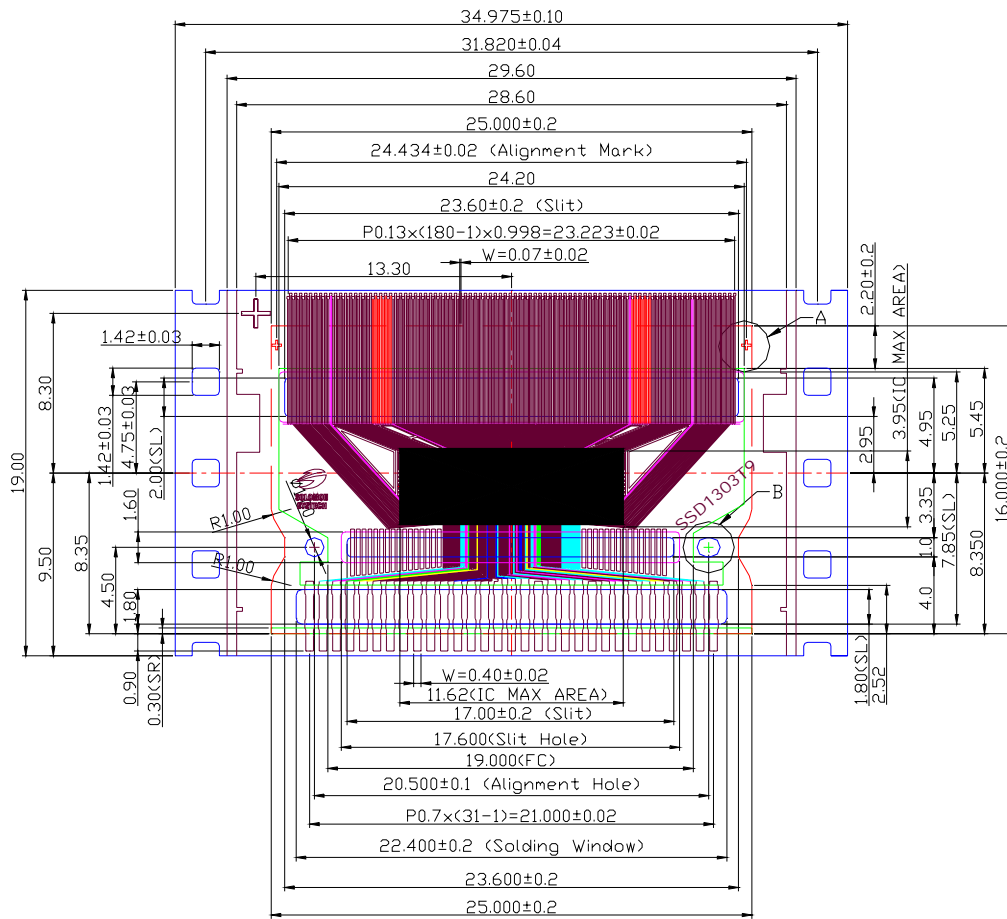

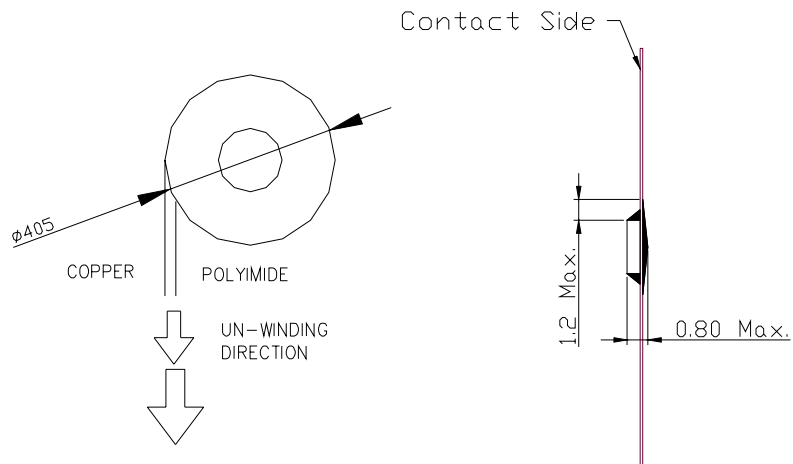


NOTE:

1. GENERAL TOLERANCE: ± 0.05 MM
2. MATERIAL
 - PI: 75 ± 6 um
 - ADHESIVE: 12 ± 2 um
 - CU: 18 ± 5 um
 - SR: 26 ± 14 um
 - TOLERANCE ± 0.150
 - FLEX COATING: FS-100L Min10um
3. SN PLATING: 0.200 ± 0.05 um
4. TAPESITE: 4 SPH, 19mm

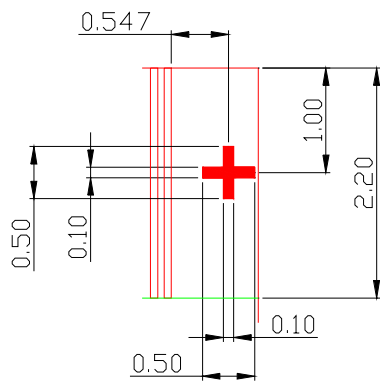


Detail A
Scale:4x



Detail B
Scale:4x

18 SSD1303Z PACKAGE DETAILS

DIE TRAY DIMENSIONS

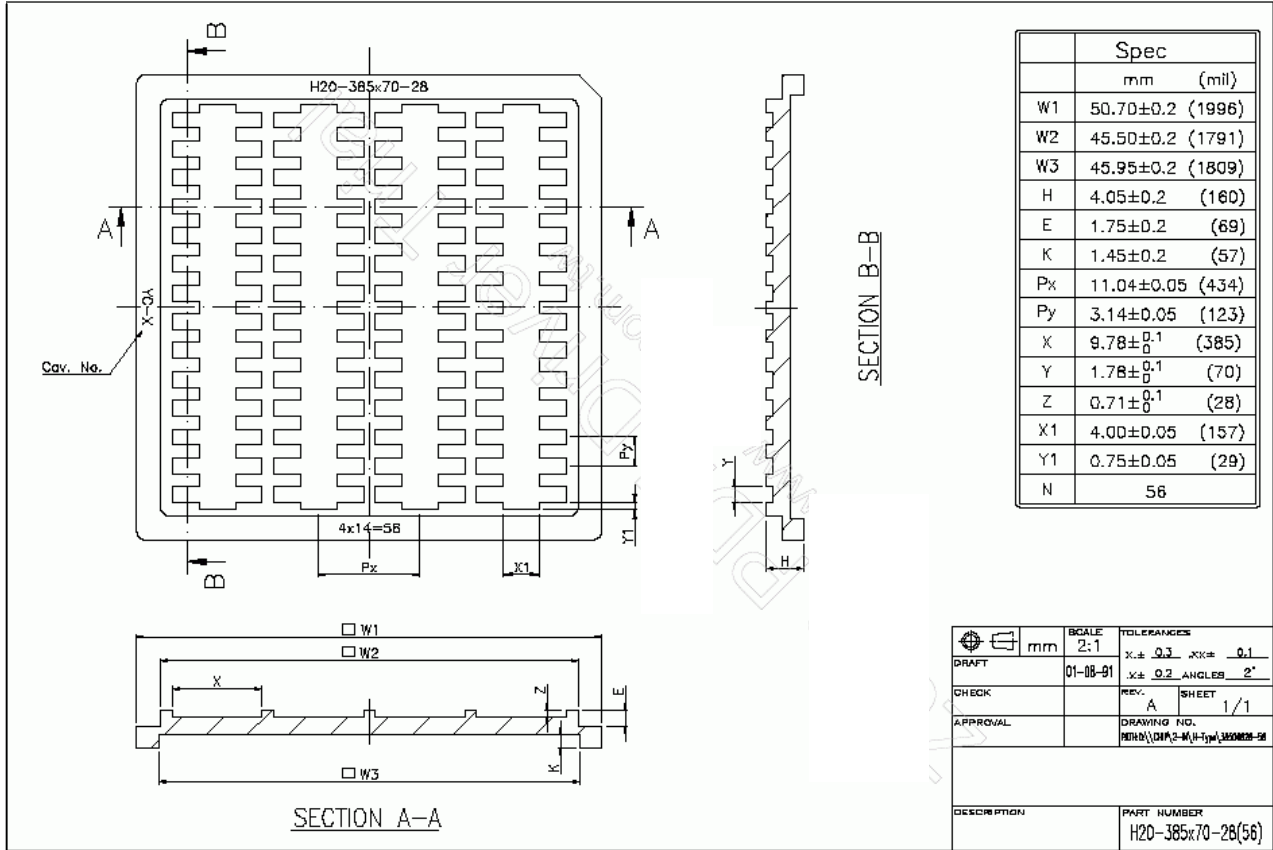

Solomon Systech reserves the right to make changes without further notice to any products herein. Solomon Systech makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Solomon Systech assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Solomon Systech does not convey any license under its patent rights nor the rights of others. Solomon Systech products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Solomon Systech product could create a situation where personal injury or death may occur. Should Buyer purchase or use Solomon Systech products for any such unintended or unauthorized application, Buyer shall indemnify and hold Solomon Systech and its offices, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Solomon Systech was negligent regarding the design or manufacture of the part.

<http://www.solomon-systech.com>